

Ŧ	۵	н п	m	0



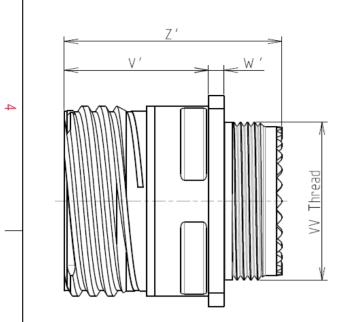

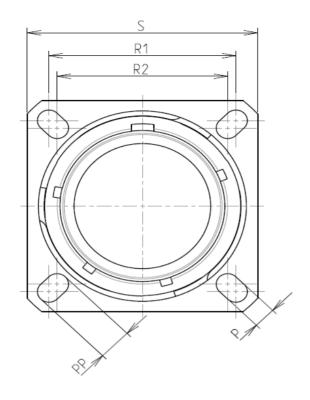

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 17

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite
-Shell Plating	: Nickel
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy 0.8 μ m minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	-65°C to +200°C

: 2000 hours

8D 0

G

17

Μ


22

S

F

А

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	26.97
R2	24.61
S	33.3±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
VV THREAD	M25x1-6g

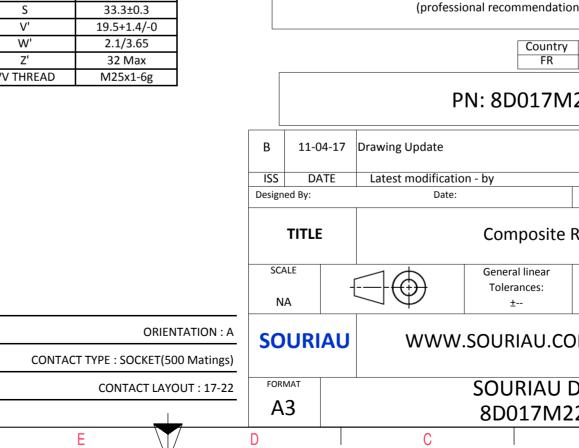

0		σ	:	A	
		R			4
LAY	YOUT SHOWN AS EX	KAMPLE			3
due to a use the Specifications (professi	not be liable for any of the Products wh issued by either of onal recommendat Countr FR N: 8D017N	ich does not co the Parties or ion, technical r y Juris	omply with by a third party		2
Drawing Update Latest modificatio	on - by			MOD N°	
Date:	Composite	Receptac	CUSTOMER DRAWIN	G	
$\exists \Phi$	General linear Tolerances: ±		NPRDS / PROJECT 859		1
WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	SOURIAU 8D017M			SHEET 1/2	
С		B		A	J

		G	н п	m	D	0	
4		Contact Layout				F SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	Panel Cuto
	Ctc	2#12 2#8 Triax 17-22 X Y				Max. thickness panel for receptacle: Ty	Ø⊺ vpe 0: front m
ယ	A B C D	0 4.57 6.32 0 0 -4.57 -6.32 0				Dim ØA ØAA R1 ØT	
						SOURIAU shall not be li due to a use of the P the Specifications issued (professional rec	Products v by either
2						PN: 8	Coun FR
						04-17 Drawing Update ATE Latest modification - by Date:	
_ _					TITL SCALE NA	Gen	eral linear lerances: ±
					FORMAT A3	SO	RIAU. URIAU
	Н	G	F	E	D		

