

—	D G	п	m	D	O



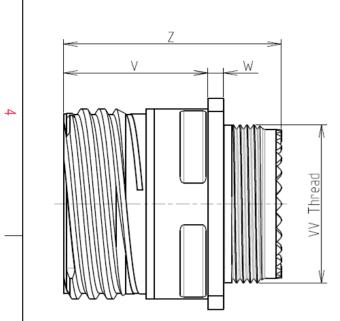

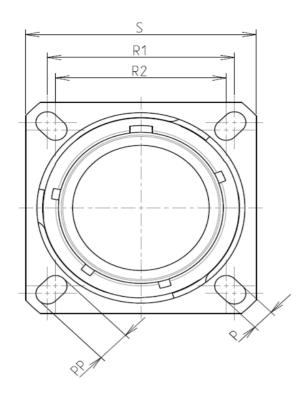

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 17

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
	-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories					
	-Temperature Range	-65°C to +200°C			

: 500 hours

8D 0

G

17

S

22

А

F

А


Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
PP	4.93±0.2	
R1	26.97	
R2	24.61	
S	33.3±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M25x1-6g	


ORIENTATION : A

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 17-22



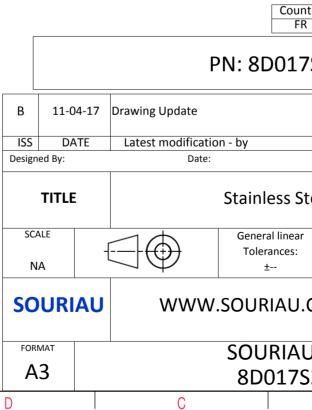

	ω		A			
					4	
AS EX4	AMPLE				3	
s which er of t indation untry FR	non-conformit ch does not co che Parties or k on, technical n Jurisd	mply with by a third par			2	
		CUSTOME	R DRAWING	MOD N°		
Steel Receptacle 8D series						
ar	NPRDS / PROJECT 859					
	J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N° 2AA-C			SHEET 1/2		
52	B		A		J	

	工	Q		П	m	D		0	
4		Contact Layout 22					SQ	Pa	anel Cut
	Ctc	2#12 2#8 Triax 17-22 X Y						Max. thickness panel for receptacle: Type	<u>ŏ⊤</u> e 0: front m
ယ	A B C D	0 4.57 6.32 0 0 -4.5 -6.32 0	7					Dim ØA ØAA R1 ØT	
	-							SOURIAU shall not be lia due to a use of the Pro the Specifications issued b (professional reco	oducts v y either
2								PN: 81	Cour FF D017
						B ISS Designe	DATE	Drawing Update Latest modification - by Date:	
_						SCAI NA		[less S ral linear trances: ±
						FORM		SOL 8D	
	Н	G	I	F	E	D		С	I

