

T	۵	П	m	0



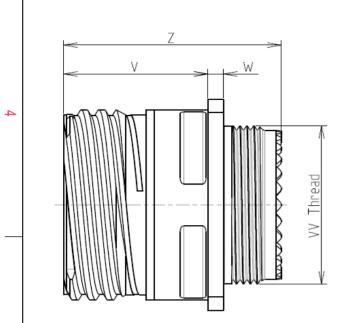

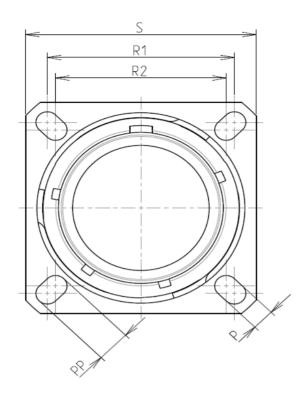

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS	
-----------------	--

BASIC SERIES:

SHELL SIZE : 17

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet \sim -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C -Salt Spray : 500 hours -Mass : 80.87 g ± 10%

8D 0

G

17

S

75

В

F

В


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		


ORIENTATION : B

CONTACT LAYOUT : 17-75

CONTACT TYPE : SOCKET(500 Matings)

Е



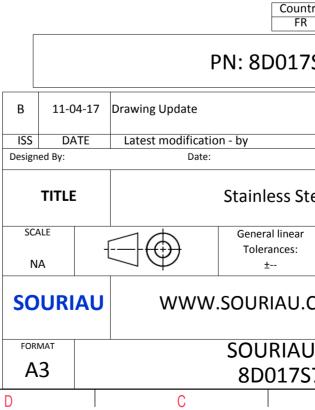

	Φ		A		
					4
AS EXA	AMPLE				3
s which er of t indation untry FR	non-conformit th does not co he Parties or to n, technical no Jurisd	mply with by a third part			2
		CUSTOMER	R DRAWING	MOD N°	
Steel Receptacle 8D series					
ar :			PROJECT 59		1
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N° 5BB-C			SHEET 1/2	
	B		А		J

ſ	Ŧ	െ	ات	m	D	0	
		Contact Layout				P SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	Panel Cuto
4		75			۸ ح	REAR MOUNTING	
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75			<u>_</u>	Max. thickness panel for receptacle: Typ	Ø⊺ vpe 0: front m
ى	В	0 -4.75				Dim ØA ØAA R1 ØT	
	F					SOURIAU shall not be lia	
N						due to a use of the P the Specifications issued B (professional rec	by either
					B 11-04-	PN: 8	
					ISS DATI Designed By: TITLE	Date:	nless St
<u> </u>					SCALE NA		eral linear lerances: ±
					FORMAT A3	SOL	URIAU.
l	Н	G	F	E	D	С	

