
T	۵	н т.	m	0





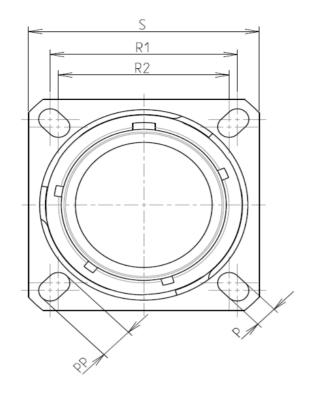

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability : 500 Mating cycles				
-Delivered without Souriau contacts				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 500 hours			

8D 0

G

17

W

22

Ρ

F

N L

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		


Delivered W/O Contacts


CONTACT LAYOUT : 17-22

CONTACT TYPE : PIN(500 Matings)

Е

ORIENTATION : N



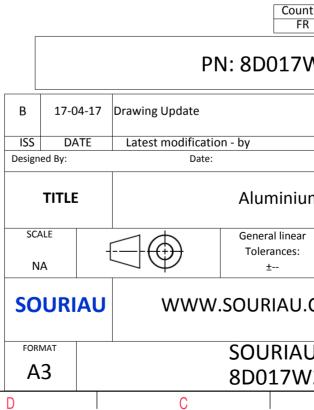

σ				
			4	
IS EXAMPLE			3	
any non-conformits which does not co er of the Parties or I idation, technical n intry Jurisc	omply with by a third party		2	
		MOD N°		
	CUSTOMER DRAWING			
um Receptac	n Receptacle 8D series			
ar	NPRDS / PROJECT 859		1	
I.COM	This document is the property of			
U DRG N°	1	SHEET		
N22PNL-C	A	1/2	J	
_				

		۵	г П	m		0	
4		Contact Layout 22				P SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	Panel Cut
 ى	Ctc A B C D	2#12 2#8 Triax 17-22 X Y 0 4.57 6.32 0 0 -4.57 -6.32 0				Max. thickness panel for receptacle: Typ Dim ØA ØAA R1	
	-					ØT SOURIAU shall not be lia due to a use of the P the Specifications issued b (professional reco	Products v by either
2					B 17	PN: 8C	Cour FF
					ISS I Designed By: TIT	LE Alu	uminiu
<u> </u>					NA SOUR FORMAT		eral linear lerances: ± RIAU.
	Н	G	F	E	A3		017W
				\	V		

