

Ŧ	۵	П	m	D	<u>с</u>



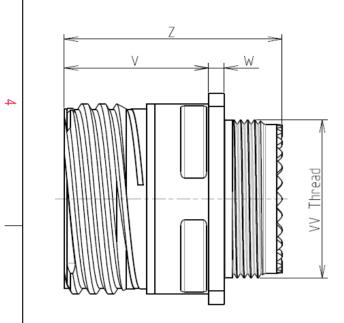

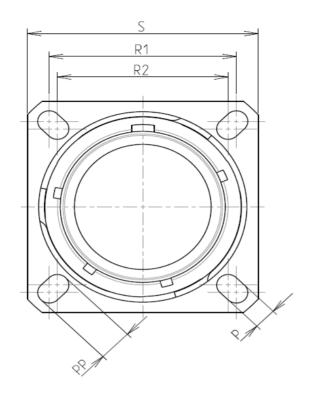

LAYOUT SHOWN AS

Keying Shown as example

75

S

F

N L

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium			
	-Shell Plating	: Olive drab Cadmium			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability		: 500 Mating cycles			
	-Delivered without Souriau contacts				
	-Temperature Range	: -65°C to +175°C			
	-Salt Spray	: 500 hours			

: 30.91 g ± 10%

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		

Delivered W/O Contacts


CONTACT LAYOUT : 17-75


CONTACT TYPE : SOCKET(500 Matings)

Е

**ORIENTATION : N** 

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

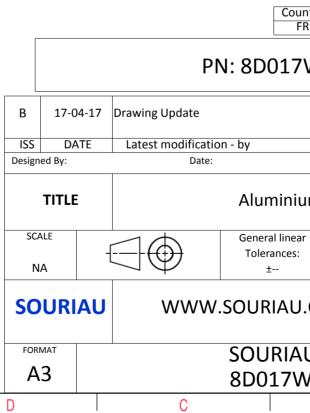

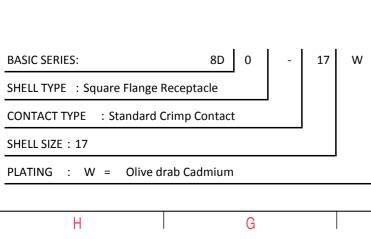

	σ		A			
					4	
AS EXA	AMPLE				3	
s whic er of t	non-conformit ch does not co the Parties or t on, technical n Jurisd	mply with by a third part			2	
w	W75SNL					
				MOD N°		
		CUSTOME	R DRAWING			
um	n Receptacle 8D series					
ar :	NPRDS / PROJECT 859					
J.CC	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				1	
	U DRG N°			SHEET		
N7	5SNL-C		A	1/2	J	
	В	I	А			

		െ	н <b>г</b>	m		0		
		Contact Layout <b>75</b>				Panel Cuto SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING R1		
4					× -			
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75			<u>_</u>	Max. thickness panel for receptacle: Ty	_Ø⊺ ype 0: front m	
ى						Dim ØA ØAA R1 ØT	\	
	$\vdash$					SOURIAU shall not be lia due to a use of the P		
27						the Specifications issued by either of (professional recommendation)		
					B 17-04-1 ISS DATE	PN: 80	)017\	
					Designed By: TITLE SCALE	Date:	uminiu Ieral linear	
<u> </u>					NA SOURIA	U www.sou		
	Н	G	F	E	FORMAT A3		URIAU 017W	
		. ~		\		· •		

