

Ŧ	۵	П	m	0



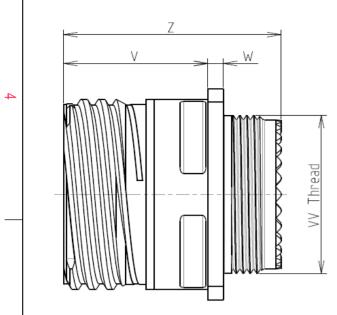

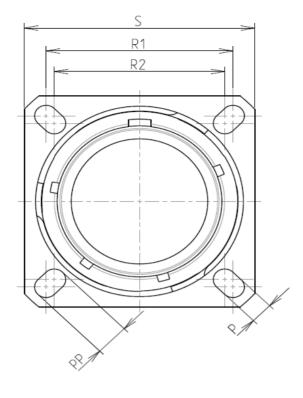

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 17

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Without Plating			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8 μm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			

: 2000 hours

8D 0

G

17

Х

22

А

F

В


Dim Nominal			
Dim	Nominai		
Р	3.25±0.2		
PP	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		


ORIENTATION : B

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 17-22



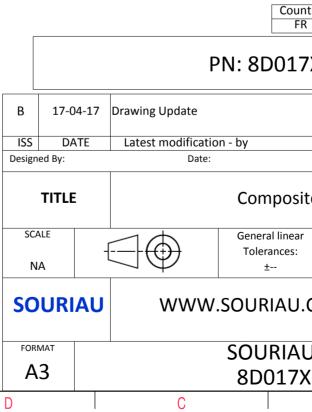

	ω		Þ		
					4
AS EXA	AMPLE				3
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)					
untry FR	Jurisd	liction & Cont Not Listed	rol List		2
7X22AB					
				MOD N°	
		CUSTOME			
site	te Receptacle 8D series				
ar	NPRDS / PROJECT 859				4
J.CC	DM	it mus	ument is the prop SOURIAU t not be reproduce icated without per	ed or	1
U DRG N°		<u> </u>		SHEET	
X2	2AB-C B		A	1/2	J

r	τ	G	н г	m	D		0
4		Contact Layout 22					Panel Cu
	Ctc A B C D	2#12 2#8 Triax 17-22 X Y 0 4.57 6.32 0 0 -4.57 -6.32 0				Max. thickness	panel for receptacle: Type 0: front
	+					du	IAU shall not be liable for e to a use of the Products cifications issued by eithe (professional recommen
S					В	17-04-17 Drawing U	PN: 8D01
					ISS Designed	DATE Latest n By: TLE	nodification - by Date: Compos
→							General linea Tolerances: ±
	Н	G	F	E	FORMAT A3		SOURIA 8D017 C
	11		i I			I	U I

