

工	G	нт. П	m	D	C C



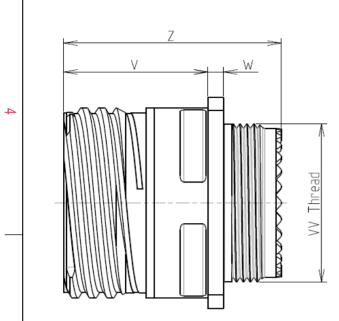

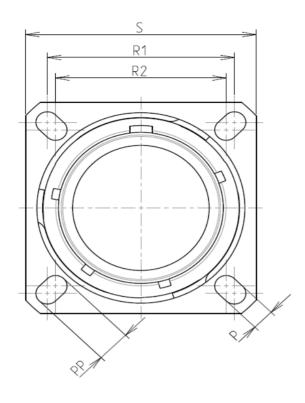

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 19

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range

: 500 hours

: 66.9 g ± 10%

8D 0

G

19

Κ

32

А


F

С

Connector dimension					
Dim	Nominal				
Р	3.25±0.2				
PP	4.93±0.2				
R1	29.36				
R2	26.97				
S	36.5±0.3				
V	20.83+0/-1.25				
W	2.1/2.5				
Z	31.5 Max				
VV THREAD	M28x1-6g				

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

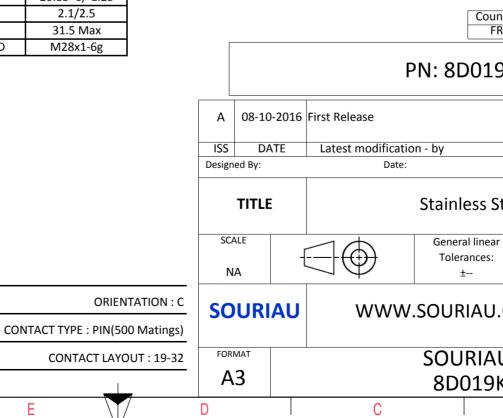

	Φ		A			
	R				4	
AS EXA	AMPLE				3	
s whic er of t	non-conformit ch does not co he Parties or t on, technical n	mply with by a third par	ty			
untry FR 9K	Jurisd	liction & Cont Not Listed	trol List		2	
				MOD N°	-	
Stee	customer drawing eel Receptacle 8D series					
ar :	NPRDS / PROJECT 859					
	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N° 2AC-C			SHEET 1/2		
	В		А		-	

