
Ŧ	G	нт. П	т	D	C





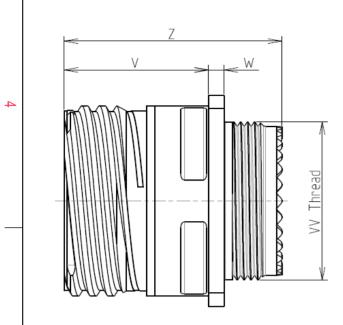

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 19

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

ł	-Shell Material	: Aluminium		
	-Shell Plating	: Olive drab Cadmium		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
	-Durability	: 500 Mating cycles		
	-Delivered with Souriau contacts and Accessories			
	-Temperature Range	-65℃ to +175℃		
	-Salt Spray	: 500 hours		

: 44.66 g ± 10%

8D 0

G

19

W

11

S


F


С

Dim	Nominal	
Р	3.25±0.2	
PP	4.93±0.2	
R1	29.36	
R2	26.97	
S	36.5±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M28x1-6g	

CONTACT TYPE : SOCKET(500 Matings)

Е



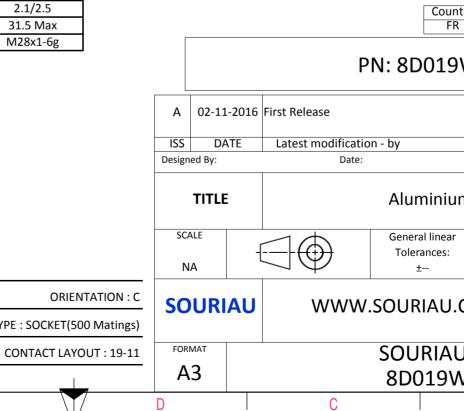

	Β		A			
		<b>}</b>			4	
S EXA	AMPLE				3	
s which er of t indatic untry FR	non-conformit ch does not co che Parties or k on, technical n Jurisd	mply with by a third part			2	
				MOD N°		
ar J.CC	MOD N°   CUSTOMER DRAWING   Receptacle 8D series   NPRDS / PROJECT   859   This document is the property of SOURIAU   SOURIAU   it must not be reproduced or communicated without permission   DRG N°					
	L1SC-C			1/2		
	В		А		ı	

