


—					
<u> </u>	دی	11	111	0	0

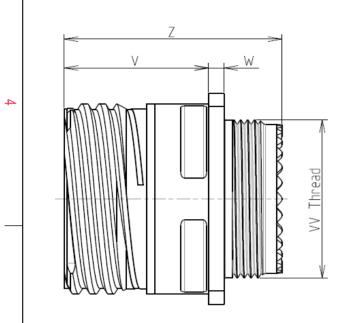

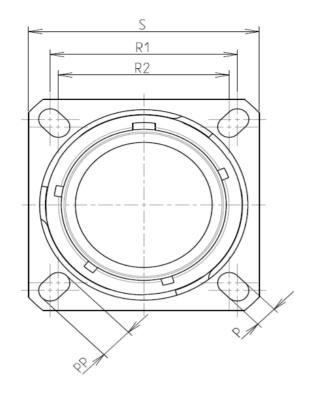



LAYOUT SHOWN AS

Keying Shown as example

L

Е

21

F

42

Ρ

F

CHARACTERISTICS

ယ

 \mathbf{N}

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts				
-Temperature Range	-65°C to +200°C			
-Salt Spray	: 48 hours			

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	31.75		
R2	29.36		
S	39.7±0.3		
V	20.07+0/-1.25		
W	2.1/3.2		
Z	31.5 Max		
VV THREAD	M31x1-6g		


Delivered W/O Contacts


CONTACT LAYOUT : 21-42


CONTACT TYPE : PIN(500 Matings)

Е

ORIENTATION : E



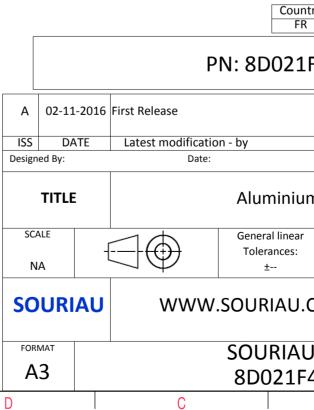



	Φ		А			
					4	
AS EXA	MPLE				3	
r any non-conformity or damage s which does not comply with er of the Parties or by a third party indation, technical notice.) Untry Jurisdiction & Control List FR Not Listed						
1F4	2PEL					
				MOD N°		
um l	customer drawing um Receptacle 8D series					
ar :	NPRDS / PROJECT 859					
J.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N° 2PEL-C			SHEET 1/2		
. r z	B		A		J	

	工	െ	н т	m	D		0	
		Contact Layout					Ра	nel Cutou
		42				S	QUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
4	(2		2
		2#4 Power 21-42				v		
	Ctc A B	X Y 0 6.19 0 -6.19					Ø ØA	<u>T</u>
							Dim ØA	
ယ							ØAA R1 ØT	
							μ	
	L				_			
							SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional record	oducts wh y either of
N								Country FR
							PN: 8D	0021F
					A	02-11-201	6 First Release	
					ISS Design	DATE ed By:	Latest modification - by Date:	
						TITLE	Alur	ninium
_ _					SCA N.			al linear ances: ±
					SO	URIAU	WWW.SOUR	RIAU.C
					FORM			RIAU
l	H	G	F	E	D		C SDL)21F4

