

т	۵	п –	m	0



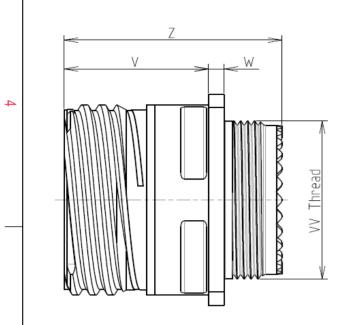

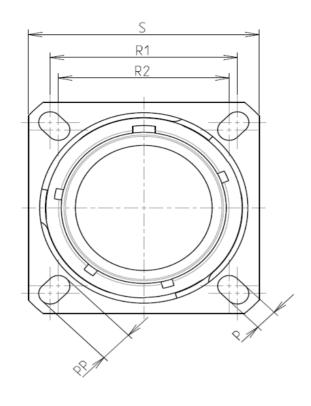

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 21

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range -Salt Spray : 48 hours

8D 0

G

21

F

42

S

F

А

Dim	Nominal
Р	3.25±0.2
РР	4.93±0.2
R1	31.75
R2	29.36
S	39.7±0.3
V	20.07+0/-1.25
W	2.1/3.2
Z	31.5 Max
VV THREAD	M31x1-6g


ORIENTATION : A

CONTACT LAYOUT : 21-42

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

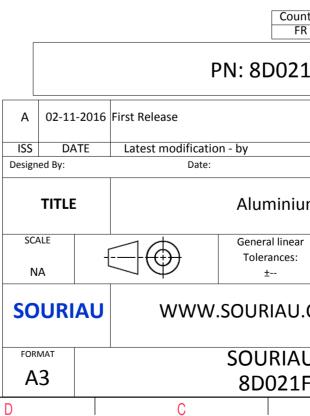

	Φ		А			
	R				4	
					3	
· any i	AMPLE non-conformit				0	
er of t idatio	which does not comply with r of the Parties or by a third party dation, technical notice.) ntry Jurisdiction & Control List					
[₌] R 2.1F4	42SA					
	1			MOD N°		
um	CUSTOMER DRAWING Receptacle 8D series					
ar	NPRDS / PROJECT 859					
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	DRG N° 2SA-C			SHEET 1/2		
	В		А		J	

_	т	۵	н т	т	D		0	
		Contact Layout					Ра	nel Cutou
4		42 •				SQUAR	RE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc A B	2#4 Power 21-42 X Y 0 6.19 0 -6.19					ØA	<u>T_</u>
cى							Dim ØA ØAA R1 ØT	
	–							
							SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional record	oducts wh / either of
N								Country FR
							PN: 8[D021F
					A	02-11-2016 F DATE	irst Release Latest modification - by	
					Designed		Date:	
					т	TITLE	Alur	ninium
_					SCAL			al linear ances: ±
					SOL	JRIAU	WWW.SOUR	IAU.C
					FORMA			RIAU 021F4
L	Н	G	F	E	D		C	

