

| Ξ | ۵ | п | m | 0 |
|---|---|---|---|---|
| | | | | |



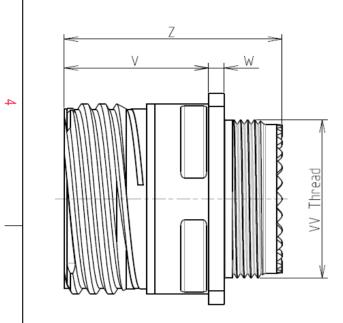

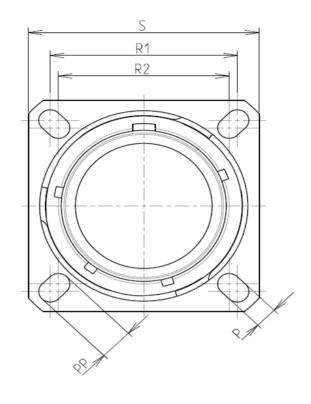

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 21

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

| | -Shell Material | : Aluminium | | | | |
|---|-------------------------------------|--|--|--|--|--|
| N | -Shell Plating | : Nickel | | | | |
| | -Insulator | : Thermoplastic | | | | |
| | -Contacts | : Copper Alloy | | | | |
| | -Seals & Grommet | : Silicon Elastomer | | | | |
| | -Contact Plating | : Gold over copper Alloy 0.8µm minimum | | | | |
| | -Durability | : 500 Mating cycles | | | | |
| | -Delivered without Souriau contacts | | | | | |
| | -Temperature Range | : -65°C to +200°C | | | | |
| | -Salt Spray | : 48 hours | | | | |

8D 0

G

21

F

42

S

F

D L

| Dim | Nominal | | |
|-----------|---------------|--|--|
| Р | 3.25±0.2 | | |
| PP | 4.93±0.2 | | |
| R1 | 31.75 | | |
| R2 | 29.36 | | |
| S | 39.7±0.3 | | |
| V | 20.07+0/-1.25 | | |
| W | 2.1/3.2 | | |
| Z | 31.5 Max | | |
| VV THREAD | M31x1-6g | | |


Delivered W/O Contacts

CONTACT LAYOUT : 21-42

CONTACT TYPE : SOCKET(500 Matings)

Е

ORIENTATION : D





| σ | | A | | | | |
|--|---|--------|---|--|--|--|
| | | | | | | |
| | | | 4 | | | |
| AS EXAMPLE | | | 3 | | | |
| any non-confor | mity or damage | | | | | |
| r any non-conformity or damage s which does not comply with er of the Parties or by a third party ndation, technical notice.) | | | | | | |
| Intry Ju FR | Jurisdiction & Control List Not Listed | | | | | |
| 1F42SDL | 42SDL | | | | | |
| | | | | | | |
| | CUSTOMER DI | MOD N° | | | | |
| um Receptacle 8D series | | | | | | |
| ar | NPRDS / PR 859 | OJECT | 1 | | | |
| J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission | | | | | | |
| U DRG N F42SDL-C | | SHEET | | | | |
| B | • | A | | | | |
| | | | | | | |

| _ | Ŧ | ۵ | н г | m | | | 0 | |
|----------|---------------|-----------------------------------|------------|---|---------------|----------------|--|--------------------------|
| | | Contact Layout | | | | | Ра | nel Cutou |
| | | 42 | | | | S | QUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING | |
| 4 | | , , | | | | λ Σ | R1 | |
| | | 2#4 Power | | | | | | |
| | Ctc A B | 21-42 X Y 0 6.19 0 -6.19 | | | | × (| | <u>T</u> |
| | | | | | | | Dim ØA | |
| ယ | | | | | | | ØAA R1 | |
| | | | | | | | ØT | |
| | _ | | | | | | | |
| \frown | _ | | | | | | SOURIAU shall not be liab | ole for any |
| | | | | | | | due to a use of the Pro the Specifications issued by (professional recor | oducts wh / either of |
| N | | | | | | | | Country |
| | | | | | | | PN: 8D | 021F |
| | | | | | A | 02-11-201 | 6 First Release | |
| | | | | | ISS Design | DATE ed By: | Latest modification - by Date: | |
| | | | | | | TITLE | Alur | ninium |
| <u> </u> | | | | | SCA N. | | | al linear ances: ± |
| | | | | | SO | URIAU | J WWW.SOUR | IAU.C |
| | | | | | FOR | | | RIAU |
| l | | <u> </u> | F | | A | 3 | |)21F4 |
| | Н | l G | F | E | D | | С | I |

