

Ξ	۵	п	m	0



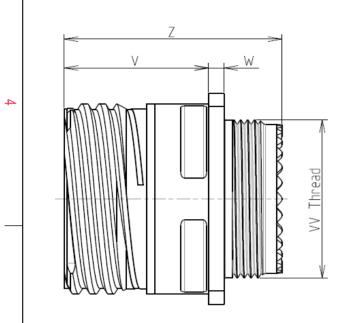

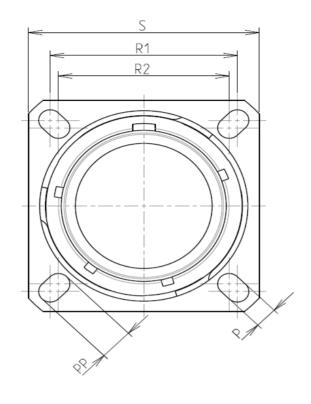

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 21

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

<u> </u>	-Shell Material	: Aluminium				
		. Adminian				
	-Shell Plating	: Nickel				
	-Insulator	: Thermoplastic				
	-Contacts	: Copper Alloy				
N	-Seals & Grommet	: Silicon Elastomer				
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
	-Durability	: 500 Mating cycles				
	-Delivered without Souriau contacts					
	-Temperature Range	65°C to +200°C				
	-Salt Spray	: 48 hours				

8D 0

G

21

F

72

S

F

Ν

L

Dim	Nominal	
Р	3.25±0.2	
PP	4.93±0.2	
R1	31.75	
R2	29.36	
S	39.7±0.3	
V	20.07+0/-1.25	
W	2.1/3.2	
Z	31.5 Max	
VV THREAD	M31x1-6g	


Delivered W/O Contacts

CONTACT LAYOUT : 21-72

CONTACT TYPE : SOCKET(500 Matings)

Е

ORIENTATION : N





Ξ		A				
				4		
S EXAMPLE				3		
any non-conformi	omply with					
er of the Parties or Idation, technical r		ty				
Intry Juris R	diction & Cont Not Listed	rol List		2		
1F72SNL	72SNL					
	CUSTOME	R DRAWING	MOD N°			
um Receptacle 8D series						
ar	NPRDS / PROJECT 859					
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
UDRG N° SHEET F72SNL-C 1/2						
B		A	_, _	J		

		۵	нт — — — — — — — — — — — — — — — — — — —	т	D	0
4	(Contact Layout 72				Panel Cutou
	Ctc	2#4 Power 6#16 21-72 X Y			Ŷ	
ω	A B C D E F G H	0 6.19 8.5 4.3 6.25 0 8.5 -4.3 0 -6.19 -8.5 -4.3 -6.25 0 -8.5 4.3				Dim ØA ØAA R1 ØT
$ \rightarrow $						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of
N						(professional recommendati Country FR PN: 8D021F
					ISS DATE Designed By:	16 First Release Latest modification - by Date:
<u> </u>					SCALE NA	Aluminium General linear Tolerances: ±
			_		FORMAT A3	SOURIAU 8D021F7
	Н	G	F	E	D	C

