

|--|



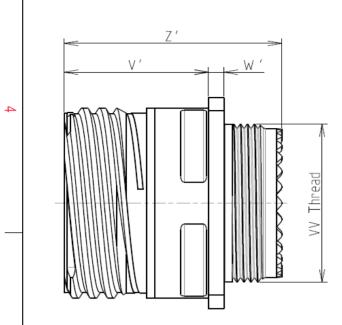

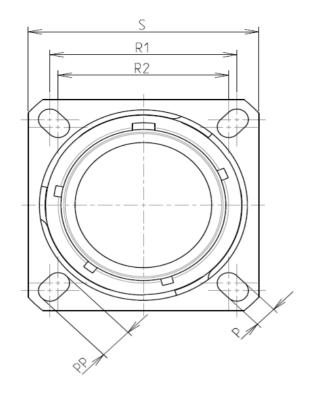

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 21

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite
-Shell Plating	: Olive drab Cadmium
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy 0.8µm minimum
-Durability	: 500 Mating cycles
-Delivered with Souria	u contacts and Accessories
-Temperature Range	: -65°C to +175°C

: 2000 hours

8D 0

G

21

J

72

В

F

А


Connector	[
Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	31.75
R2	29.36
S	39.7±0.3
V'	18.7+1.4/-0
W'	2.1/4.35
Z'	32 Max
VV THREAD	M31x1-6g


ORIENTATION : A

CONTACT LAYOUT : 21-72

CONTACT TYPE : SOCKET(500 Matings)

Е



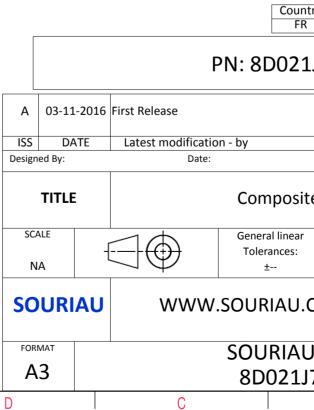

	σ	1	A		
		3			4
AS EXA	AMPLE				3
whice er of t idatio untry R	non-conformit ch does not co he Parties or b on, technical n Jurisd	mply with by a third part			2
		CUSTOMER		MOD N°	
site	Receptacl	e 8D serie	es Project		
			59	orty of	1
	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N°			SHEET	
J72	2BA-C			1/2	J
	В	I	А		

	т	۵	нт — — — — — — — — — — — — — — — — — — —	т	D	0
4		Contact Layout 72				SQUARE FLANGE RECEPTACLE (TYPE 0)
_	Ctc	2#4 Power 6#16 21-72 X Y 0 6.19				ØI
ω	A B C D E F G H	0 6.19 8.5 4.3 6.25 0 8.5 -4.3 0 -6.19 -8.5 -4.3 -6.25 0 -8.5 4.3				Dim ØA ØAA R1 ØT
N						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendati Country FR
_					A 03-11-201 ISS DATE Designed By:	PN: 8D021J 6 First Release Latest modification - by Date:
					TITLE SCALE NA	General linear Tolerances: ±
	H	G	F	E	FORMAT A3 D	WWW.SOURIAU.C SOURIAU 8D021J7 C
					V	

