

|--|



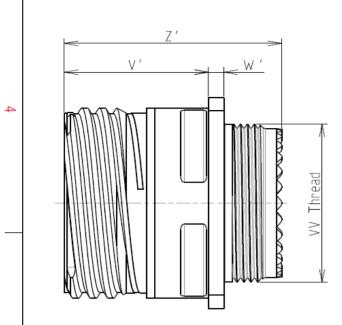

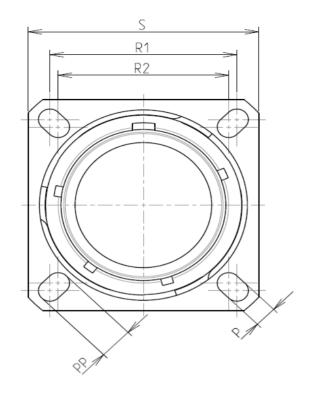

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 21

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite				
-Shell Plating	: Olive drab Cadmium				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65°C to +175°C				

: 2000 hours

8D 0

G

21

J

72

В

F

В


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	31.75
R2	29.36
S	39.7±0.3
V'	18.7+1.4/-0
W'	2.1/4.35
Z'	32 Max
/V THREAD	M31x1-6g


ORIENTATION : B

CONTACT LAYOUT : 21-72

CONTACT TYPE : SOCKET(500 Matings)

Е



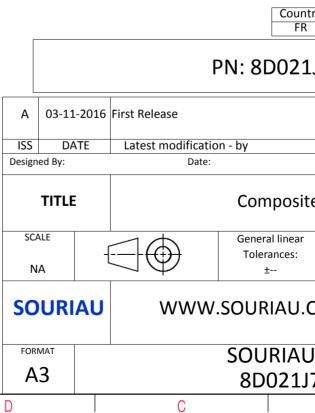

	œ		A			
					4	
	AMPLE				3	
s whic er of t idatio	non-conformit th does not co he Parties or t on, technical n	mply with by a third part otice.)				
Intry R	Jurisd	liction & Cont Not Listed	rol List		2	
21J7	J72BB					
		CUSTOME	R DRAWING	MOD N°		
site	e Receptacle 8D series					
ar :			PROJECT 59		1	
J.CC	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N°			SHEET		
LJ72	2BB-C B		A	1/2	J	
	U	I	~			

	Ξ	۵	ات	т		0
4		Contact Layout 72				RUARE FLANGE RECEPTACLE (TYPE 0)
	Ctc	2#4 Power 6#16 21-72 X Y 0 6.19			<u> </u>	ØT
ω	A B C D E F G H	0 6.19 8.5 4.3 6.25 0 8.5 -4.3 0 -6.19 -8.5 -4.3 -6.25 0 -8.5 4.3				Dim ØA ØAA R1 ØT
N						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendati Country FR
					A 03-11-201 ISS DATE Designed By:	PN: 8D021J
→					TITLE SCALE NA	General linear Tolerances:
	H	G	F	E	FORMAT A3	WWW.SOURIAU.C SOURIAU 8D021J7 C
	11		I I			`

