

	T	G	П	m	0
ſ					



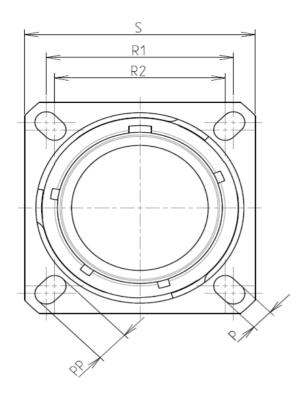



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 21

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer : Gold over copper Alloy 0.8µm minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C

: 500 hours

8D 0

G

21

Κ

42

А


F

С

Connector dimension Dim Nominal 3.25±0.2 Р PP 4.93±0.2 31.75 R1 29.36 R2 S 39.7±0.3 V 20.07+0/-1.25 W 2.1/3.2 31.5 Max Ζ VV THREAD M31x1-6g

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

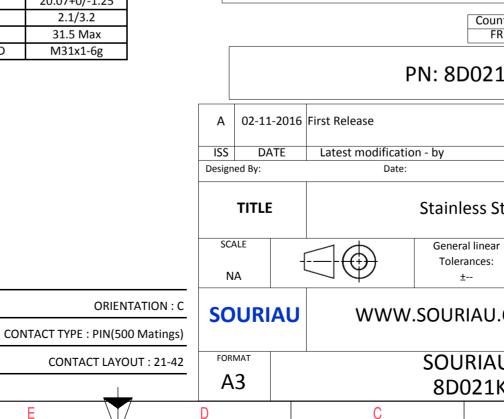

	Φ		A		_	
					4	
AS EXA	AMPLE				3	
s whic er of t ndatio untry FR	non-conformit ch does not co he Parties or b on, technical no Jurisd	mply with by a third part			2	
	1			MOD N°		
Stee	CUSTOMER DRAWING el Receptacle 8D series					
		8	59		1	
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	DRG N°			SHEET		
.К4	2AC-C			1/2	J	
	В		А			

	Ŧ	۵	וד	m	D		0	
		Contact Layout					Ра	nel Cutou
		42				S	QUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
4	(, ,				A		2
		2#4 Power						
	Ctc A B	21-42 X Y 0 6.19 0 -6.19				¥ (<u>.T</u>
							Dim ØA	
ယ							ØAA R1	
							ØT	
	F							
							SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional reco	oducts wh y either of
N								Country
							PN: 8[L
						00.44.004		
					A	02-11-2010 DATE	6 First Release Latest modification - by	
					Designe		Date:	
						TITLE	Stainl	ess Ste
					SCA		-{	al linear rances:
<u> </u>					N			±
					SO	URIAU	WWW.SOUR	RIAU.C
					FORM			RIAU
		-	_			3	8D(021K4
	Н	l G	F	E	D		С	

