

Ŧ	G	н п	m	<b>O</b>



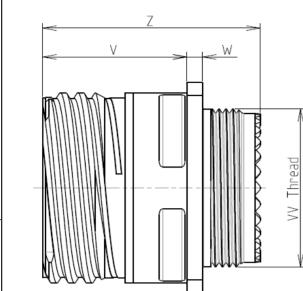

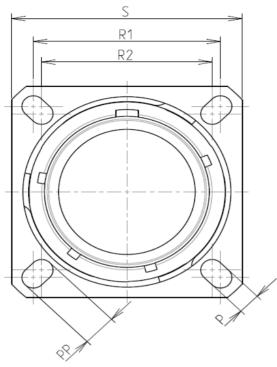

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 21

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

4

ω

 $\mathbf{N}$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet : Gold over copper Alloy -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C

: 500 hours

8D 0

G

											]
	п	m		D		0		Φ		Þ	ן ו
VV Thread		S 2 2 4 2 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4				LAY	OUT SHOWN AS EX	KAMPLE			4
	Keying Shown	as example									
oy 0.8µm minimum	- - - - - - - - - - - - - - - - - - -	Connector dimension       Dim     Nominal       P     3.25±0.2       PP     4.93±0.2       R1     31.75       R2     29.36       S     39.7±0.3       V     20.07+0/-1.25       W     2.1/3.2       Z     31.5 Max       VV THREAD     M31x1-6g				due to a use o pecifications (professio	ot be liable for any of the Products wh issued by either of nal recommendati Country FR	ich does not con the Parties or b ion, technical no y Jurisdi	mply with y a third party		2
ies						Р	N: 8D021K	42AD			
				A 02-11-20	016 First Re	lease					
				ISS DATE Designed By:	Lates	t modification Date:	1 - by		CUSTOMER DRAW	MOD N°	
			TITLE Stainless Steel Receptacle 8								
- 21 K	42 A D			SCALE NA		$\bigcirc$	General linear Tolerances: ±		NPRDS / PROJEC <b>859</b>		1
		ORIENTATION : D CONTACT TYPE : PIN(500 Matings)		SOURIA	U				This document is the property of SOURIAU it must not be reproduced or communicated without permission		
		CONTACT LAY	OUT : 21-42	FORMAT A3			SOURIAU			SHEET	
	F	E	1			С	8D021K4	EPERCE		1/2 A	
			/			-					

	Ŧ	م	н <b>т</b>	m	D		0	
		Contact Layout					Ра	nel Cutou
		42				SC	QUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
4		, ,						2
		2#4 Power						
	Ctc A B	21-42 X Y 0 6.19 0 -6.19				¥	Ø ØA	<u>T</u>
							Dim ØA	
ယ							ØAA R1	
							ØT	
	F							
	•						SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional record	oducts wh / either of
N								Country
							PN: 80	
					A	02-11-2016 DATE	5 First Release Latest modification - by	
					Designe		Date:	
						TITLE	Stainl	ess Ste
					SCA	LE		al linear ances:
<b>_</b>					NA			<u>t</u>
					SO	URIAU	WWW.SOUR	IAU.C
					FORM		SOU	RIAU
		1	I	7	A	3	8D(	)21K4
	Н	l G	F	E	D		С	

