
 (L)	 	0	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 21

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Stainless Steel
-Shell Plating	: Passivated
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	-65°C to +200°C
-Salt Spray	: 500 hours

: 85.93 g ± 10%

8D 0

G

21

Κ

48

А

F

D


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	31.75		
R2	29.36		
S	39.7±0.3		
V	20.07+0/-1.25		
W	2.1/3.2		
Z	31.5 Max		
VV THREAD	M31x1-6g		


ORIENTATION : D

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 21-48



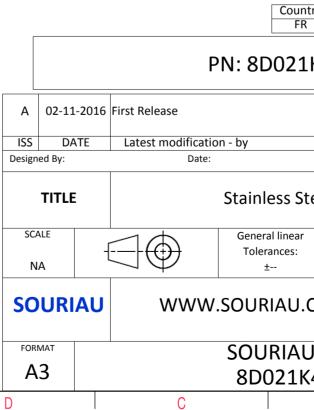

	Φ		A		
	R				4
SS EXA	AMPLE				3
s which er of t indation untry FR	non-conformit ch does not co che Parties or b on, technical no Jurisd	mply with by a third par	ty		2
		CUSTOME	R DRAWING	MOD N°	
Stee	el Recepta	cle 8D se	eries		
ar :			/ PROJECT		
J.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				1
	DRG N° 8AD-C			SHEET	
114	B		A		J

r	Ŧ	െ	нт —	m	D		0	
		Contact Layout					F	Panel Cut
		48				SI	QUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING R1	
4						12		
	· · · · · · · · · · · · · · · · · · ·	4#8 Power 21-48				V		
	Ctc	ХҮ					ØA_	ØT_
	A	4.57 4.57 4.57 -4.57						
	C	-4.57 -4.57					Dim	
ယ	D	-4.57 4.57					ØA ØAA	
							R1 ØT	
							SOURIAU shall not be li due to a use of the P the Specifications issued (professional rec	Products v by either
N								Cour Ff
							PN: 8	D021
					A		6 First Release	
					ISS Design	DATE ned By:	Latest modification - by Date:	
						TITLE	Stair	nless S
<u> </u>						ALE		eral linear lerances: ±
					SC	URIAU	WWW.SOU	RIAU.

F

Е

G

Н

FORMAT

A3

D

С

