


т	۵	н п	п	0

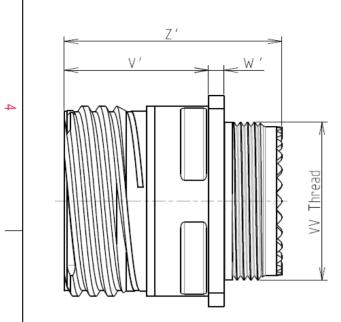

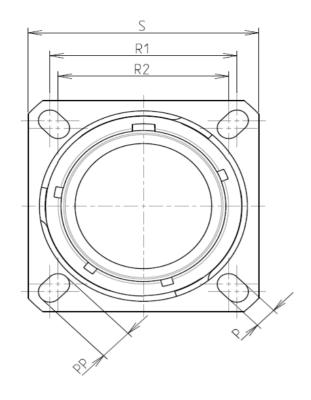



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 21

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8 $\mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +200°C			

: 2000 hours

8D 0

G

21

Μ

35

Н

F

Ν

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
РР	4.93±0.2			
R1	31.75			
R2	29.36			
S	39.7±0.3			
V'	18.7+1.4/-0			
W'	2.1/4.35			
Ζ'	32 Max			
VV THREAD	M31x1-6g			


ORIENTATION : N

CONTACT LAYOUT : 21-35

CONTACT TYPE : PIN (1500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

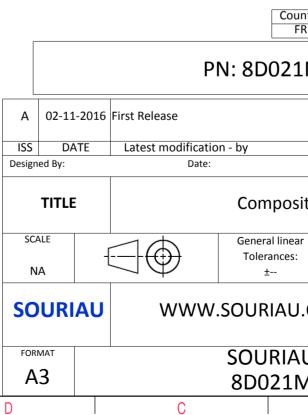

	Þ				
		4			
AS EXAMPLE		3			
r any non-conformity or dama s which does not comply with er of the Parties or by a third p ndation, technical notice.)					
untry Jurisdiction & C FR Not List		2			
M35HN					
CUSTOR	MOD N°				
site Receptacle 8D se					
ar NPRC	NPRDS / PROJECT 859				
This	6 document is the property of	1			
J.COM it r	COUDIAL				
	SHEET				
M35HN-C	1/2				
U	A				

