

| т | ۵ | н <b>т</b> | m | 0 |
|---|---|------------|---|---|
|   |   |            |   |   |



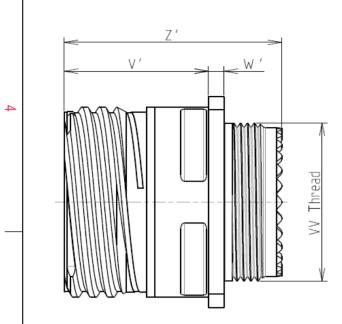



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 21

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

| - |                        |  |
|---|------------------------|--|
| / | -Shell Material        | : Composite                            |
|   | -Shell Plating         | : Nickel                               |
|   | -Insulator             | : Thermoplastic                        |
|   | -Contacts              | : Copper Alloy                         |
|   | -Seals & Grommet       | : Silicon Elastomer                    |
| 2 | -Contact Plating       | : Gold over copper Alloy 0.8µm minimum |
|   | -Durability            | : 500 Mating cycles                    |
|   | -Delivered with Souria | u contacts and Accessories             |
|   | -Temperature Range     | : -65°C to +200°C                      |
|   | -Salt Spray            | : 2000 hours                           |
|   | -Mass                  | : 37.7 g ± 10%                         |
|   |                        |  |
|   |                        |  |

8D 0

G

21

Μ

48

Ρ

F

Ν

| is example          |             |  |  |  |  |
|---------------------|-------------|--|--|--|--|
| Connector dimension |             |  |  |  |  |
| Dim                 | Nominal     |  |  |  |  |
| Р                   | 3.25±0.2    |  |  |  |  |
| PP                  | 4.93±0.2    |  |  |  |  |
| R1                  | 31.75       |  |  |  |  |
| R2                  | 29.36       |  |  |  |  |
| S                   | 39.7±0.3    |  |  |  |  |
| V                   | 18.7+1.4/-0 |  |  |  |  |
| W'                  | 2.1/4.35    |  |  |  |  |
| Ζ'                  | 32 Max      |  |  |  |  |
| VV THREAD           | M31x1-6g    |  |  |  |  |


ORIENTATION : N

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 21-48

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

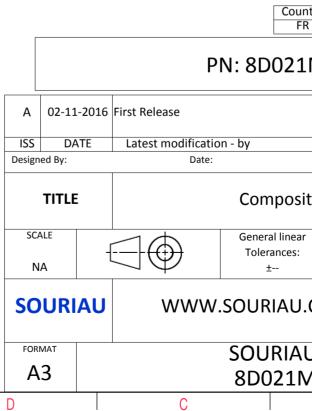

|  | Φ  |   | Þ  |                   |   |
|--|--|---|--|-------------------|---|
|  |  |   |  |                   | 4 |
| AS EXA                                       | AMPLE  |   |  |                   | 3 |
| s which<br>er of t<br>ndation<br>untry<br>FR | non-conformit<br>ch does not co<br>che Parties or to<br>on, technical no<br>Jurisd | mply with<br>by a third part                    |  |                   | 2 |
|  |  |   |  | MOD N°            |   |
| ar<br>J.CC                                   | Receptacl  | e 8D seri<br>NPRDS /<br>8<br>This doc<br>it mus | R DRAWING<br>es<br>PROJECT<br>59<br>SOURIAU<br>t not be reproduct<br>icated without pe | perty of<br>ed or | 1 |
|  | DRG N°<br>8PN-C  | ·   |  | SHEET<br>1/2      |   |
|  | В  |   | А  |                   |   |
|  |  |   |  |                   |   |

|            | т             | G                  | >                  | т | п | D             |                | 0  |  |
|------------|---------------|--------------------|--------------------|---|---|---------------|----------------|--|--|
|            |               | Contact Layout     |                    |   |   |               |                |  | Panel Cutou  |
|            |               | 48                 |                    |   |   |               | SQ             | NUARE FLANGE RECEPTACLE<br>REAR MOUNTING | (TYPE O)   |
| 4          |               |                    | 2 <sup>4</sup>     |   |   |               | 22             |  |  |
| _          |               | 4#8 Power<br>21-48 |                    |   |   |               | V              |  |  |
|            | Ctc<br>A<br>B | X<br>4.57<br>4.57  | Y<br>4.57<br>-4.57 |   |   |               |                |  | ØA_  |
|            | C             | -4.57              | -4.57              |   |   |               |                | F  | Dim  |
| ω          | D             | -4.57              | 4.57               |   |   |               |                |  | ØA<br>ØAA<br>R1  |
|            |               |                    |                    |   |   |               |                |  | ØT<br>not be liable for an   |
|            |               |                    |                    |   |   |               |                | the Specification                        | e of the Products wh<br>is issued by either of<br>sional recommendat |
| N          |               |                    |                    |   |   | F             |                |  | Countr<br>FR   |
|            |               |                    |                    |   |   |               |                | F  | PN: 8D021N   |
|            |               |                    |                    |   |   | A             | 02-11-2016     | First Release                            |  |
| _          |               |                    |                    |   |   | ISS<br>Design | DATE<br>ed By: | Latest modificati                        |  |
|            |               |                    |                    |   |   |               | TITLE          |  | Composite  |
| _ <b>_</b> |               |                    |                    |   |   |               | ALE .          |  | General linear<br>Tolerances:<br>±                                   |

F

Е

G

Н

| SOURIAU |  | WWW. | SOURIAU.C |  |
|---------|--|------|-----------|--|
| FORMAT  |  |      | SOURIAU   |  |
| A3      |  |      | 8D021M    |  |

D

С

