

	Ŧ	Q	нт. П	m	0





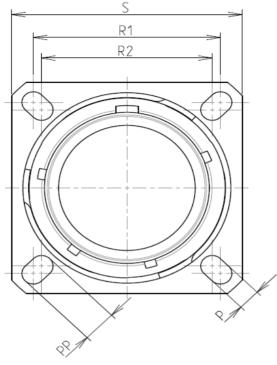

CHARACTERISTICS

4

ω

 \sim

ت	п Г		0	∞ >		-
	S R1 R2 C C C C C C C C C C C C C C C C C C			KAMPLE		4
	Keying Shown as example					
CHARACTERISTICS	Connector dimension					
-Standard : Based on MIL-DTL-38999 Series III-Shell Material: Stainless Steel-Shell Plating: Nickel-Insulator: Thermoplastic-Contacts: Copper Alloy-Seals & Grommet: Silicon Elastomer-Contact Plating: Gold over copper Alloy 0.8µm minimum-Durability: 500 Mating cycles-Delivered with Souriau contacts and Accessories	Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 31.75 R2 29.36 S 39.7±0.3 V 20.07+0/-1.25 W 2.1/3.2 Z 31.5 Max VV THREAD M31x1-6g		SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat Country FR PN: 8D021S	ich does not comply with the Parties or by a third party ion, technical notice.) y Jurisdiction & Control List Not Listed		2
-Temperature Range : -65°C to +200°C -Salt Spray : 500 hours		A 03-11-2016	First Release			
		ISS DATE Designed By:	Latest modification - by Date:	CUSTOMER DRAWING	MOD N°	
		TITLE	Stainless Ste	el Receptacle 8D series		
BASIC SERIES: 8D 0 - 21 S 72 SHELL TYPE : Square Flange Receptacle	2 B D	SCALE -[General linear Tolerances:	NPRDS / PROJECT 859		-
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 21	ORIENT	ATION : D Matings)	- SOURIAU WWW.SOURIAU.COIVI it must not be reproduced or			
PLATING : S = Nickel	CONTACT LAYOU	JT : 21-72 FORMAT A3	SOURIAU 8D021S7		SHEET	
H G	F E	D	C	B A		J

-	т	۵	н П	т	D	0
4		Contact Layout 72			Ą	SQUARE FLANGE RECEPTACLE (TYPE 0)
	Ctc A	2#4 Power 6#16 21-72 X Y 0 6.19			¥	
cى	B C D E F G H	8.5 4.3 6.25 0 8.5 -4.3 0 -6.19 -8.5 -4.3 -6.25 0 -8.5 4.3				Dim ØA ØAA R1 ØT
	_	0.0 10	I			SOURIAU shall not be liable for any
N						due to a use of the Products whi the Specifications issued by either of (professional recommendati Country FR PN: 8D021S
					A 03-11-202 ISS DATE Designed By:	L6 First Release Latest modification - by Date:
_ _					SCALE NA SOURIAU	Stainless Ste General linear Tolerances: ± WWW.SOURIAU.Co
	Н	G	F	E	FORMAT A3 D	SOURIAU 8D021S7 C

