


T	G G	нт – – – – – – – – – – – – – – – – – – –	m	<b>O</b>

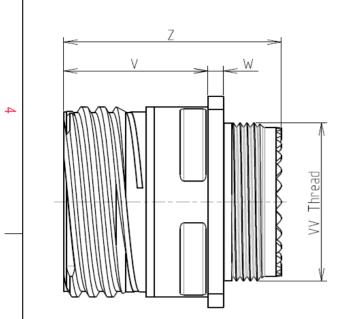

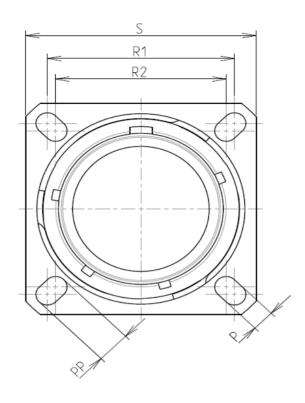



Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 21

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer : Gold over copper Alloy 0.8µm minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C

: 500 hours

8D 0


G

21

S

77

Connector dimension Dim Nominal 3.25±0.2 Р PP 4.93±0.2 31.75 R1 29.36 R2 S 39.7±0.3 V 20.07+0/-1.25 W 2.1/3.2 31.5 Max Ζ

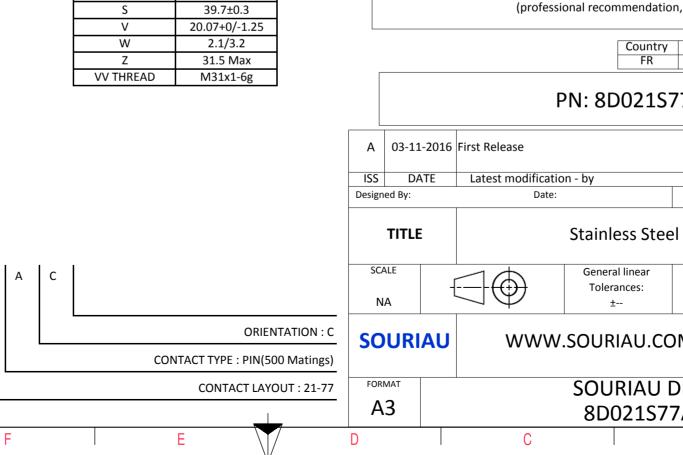

0		ω		A		_
						4
		[*/ [				
S)						
		R/A	-			
		15				
						3
LAY	OUT SHOWN AS EX	AMPLE				
	not be liable for any of the Products whi					
the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)						
Country Jurisdiction & Control List   FR Not Listed						
PN: 8D021S77AC						
First Release						
Latest modificatio	n - by	1			MOD N°	
Date: CUSTOMER DRAWING						
Stainless Steel Receptacle 8D series						
$\exists \bigoplus$	General linear Tolerances: ±		NPRDS / PF <b>859</b>			1
WWW.SOURIAU.COM   This document is the property of SOURIAU     it must not be reproduced or communicated without permission						
SOURIAU DRG N° SHEET						-
С	8D021S7	7AC-C B		A	1/2	J
-		_				

_	Ŧ	G	нт —	m	D	0
		Contact Layout				Panel Cutou
4		77				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		17#22D 2#8 Triax				
		21-77			V	
	Ctc	X Y				
	A	1.96 8.38	-			\ØA
	В	5.46 7.67	-			
	С	8.51 5.79				Dim ØA
ω	D	10.46 2.82				ØA
	E	10.46 -2.82				R1
	F	8.51 -5.79	_			ØT
	G	5.46 -7.67	_			
	H	1.96 -8.38 0 -5.41				
$ \longrightarrow $	ĸ	-1.96 -8.38	-			
	L	-5.46 -7.67				SOURIAU shall not be liable for any
	M	-8.51 -5.79				due to a use of the Products wh the Specifications issued by either of
	N	-10.46 -2.82				(professional recommendati
	P	-10.46 2.82				
	R	-8.51 5.79				Country FR
	S	-5.46 7.67	_			
	T	-1.96 8.38	_			PN: 8D021S
	U V	-4.57 0	_			
	v	4.57 0			A 03-11-201	16 First Release
					ISS DATE	Latest modification - by
					Designed By:	Date:
					TITLE	Stainless Ste
_ <b>_</b>					SCALE NA	General linear Tolerances: ±
					SOURIAU	WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D021S7
	Н	G	F	E	D	C
					V	

