


<b>T</b> 1	Q	г – т		
	1			

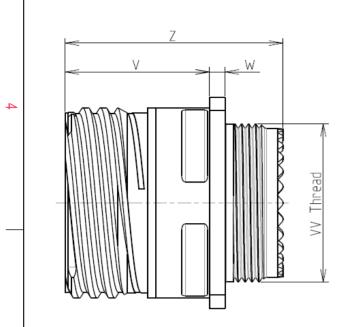

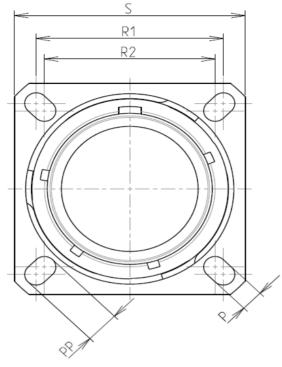



Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 21

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

ω

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Olive drab Cadmium				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	65°C to +175°C				
-Salt Spray	: 500 hours				

8D 0

G

21

-

W

42

А

F

Α

Dim	Nominal
Р	3.25±0.2
РР	4.93±0.2
R1	31.75
R2	29.36
S	39.7±0.3
V	20.07+0/-1.25
W	2.1/3.2
Z	31.5 Max
VV THREAD	M31x1-6g

т	D		0		Β	Þ	>
							4
Q // 1				YOUT SHOWN AS EX			3
ector dimension Nominal 3.25±0.2 4.93±0.2 31.75 29.36 39.7±0.3 20.07+0/-1.25 2.1/3.2			due to a use the Specifications	not be liable for any of the Products whi issued by either of onal recommendatio	ch does not co the Parties or I on, technical n	mply with by a third party otice.)	
31.5 Max	_			Country FR	Juriso	liction & Control List Not Listed	2
D M31x1-6g	M31x1-6g PN: 8D021W42AA						
	A	03-11-2016	First Release				
	ISS Designe	DATE ed By:	Latest modificatio Date:	on - by		CUSTOMER DRAWING	MOD N°
		TITLE Aluminium Receptacle 8D series					
	SCA N/			General linear Tolerances: ±		NPRDS / PROJECT <b>859</b>	
ORIENTATION : A CONTACT TYPE : PIN(500 Matings)	ORIENTATION : A SOURIAU WWW.SOURIAU.COM This document is the I SOURIAU it must not be repro		This document is the p SOURIAU it must not be reproc communicated without	property of duced or			
CONTACT LAYOUT : 21-42	FORM		SOURIAU DRG N° 8D021W42AA-C			SHEET 1/2	
E	D	-	С		B B	A	
$\vee$							

	Т	۵	וד	т	D	0	
		Contact Layout					Panel Cutou
		42				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
4					The second se		- 2
		2#4 Power					
	Ctc A B	21-42 X Y 0 6.19 0 -6.19			<u>/</u>	Ø Ø	ØI_
						Dim ØA	
ယ						ØA/ R1	
						ØT	
	F				[		
						SOURIAU shall not be I due to a use of the I the Specifications issued (professional rea	Products wh I by either of
N							Country FR
						PN: 8	D021W
					A 03-11-2	016 First Release	
					ISS DAT	-	
					Designed By:	Date:	
					TITLE	Al	uminium
<b>_</b>					SCALE NA		neral linear blerances: ±
					SOURIA	WWW.SOU	JRIAU.C
					FORMAT		URIAU
l			_		A3		0021W
	Н	G	F	E	D	C	

