

т	۵	п	т	0



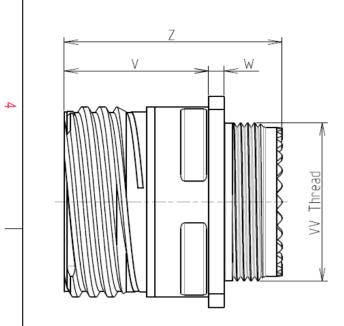



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 21

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium
-Shell Plating	: Olive drab Cadmium
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy 0.8µm minimum
-Durability	: 500 Mating cycles
-Delivered without Sou	uriau contacts
-Temperature Range	65°C to +175°C
-Salt Spray	: 500 hours

8D 0

G

21

W

42

Ρ

F

N L

Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
PP	4.93±0.2	
R1	31.75	
R2	29.36	
S	39.7±0.3	
V	20.07+0/-1.25	
W	2.1/3.2	
Z	31.5 Max	
VV THREAD	M31x1-6g	


Delivered W/O Contacts


CONTACT LAYOUT : 21-42

CONTACT TYPE : PIN(500 Matings)

Е

**ORIENTATION : N** 



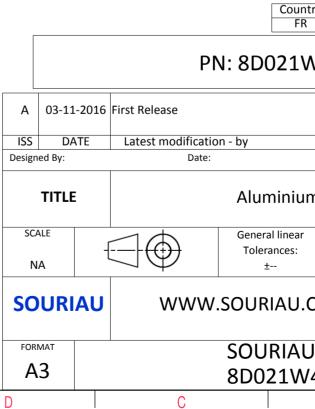

σ					
		4			
AS EXAMPLE		3			
any non-conformits which does not co er of the Parties or I ndation, technical n untry Jurisc R W42PNL	mply with by a third party	2			
	CUSTOMER DRAWING	<u> </u>			
um Receptac	le 8D series				
ar	NPRDS / PROJECT <b>859</b>	1			
I.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N°	SHE				
W42PNL-C	1/	2			
2					

_	т	۵	н <b>т</b>	т	D		O	
		Contact Layout					Pa	nel Cutou
4		<b>42</b>				SQUA	RE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc A B	2#4 Power 21-42 X Y 0 6.19 0 -6.19					ØA	<u>T</u> 2
ω							Dim ØA ØAA R1 ØT	
	L							
							SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional recor	oducts whi either of
N								Country FR
							PN: 8D0	021W
					A ISS Designed	03-11-2016 F DATE d By:	First Release Latest modification - by Date:	
					1	TITLE	Alur	ninium
<b>→</b>					SCAL		Toler	al linear ances: :
					SOL	JRIAU	WWW.SOUR	IAU.C
					FORM.			RIAU 21W4
L	Н	G	F	E	D		C	

