
т	۵	н т	m	0





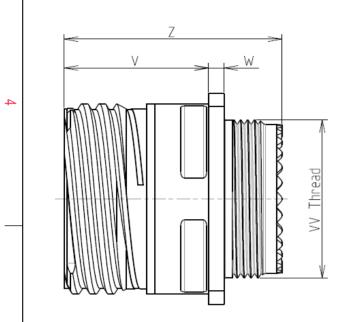

LAYOUT SHOWN AS

Keying Shown as example

L

С

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 21

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 500 hours			

8D 0

G

21

W

42

S

F

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	31.75		
R2	29.36		
S	39.7±0.3		
V	20.07+0/-1.25		
W	2.1/3.2		
Z	31.5 Max		
VV THREAD	M31x1-6g		


Delivered W/O Contacts


CONTACT LAYOUT : 21-42

CONTACT TYPE : SOCKET(500 Matings)

Е

ORIENTATION : C



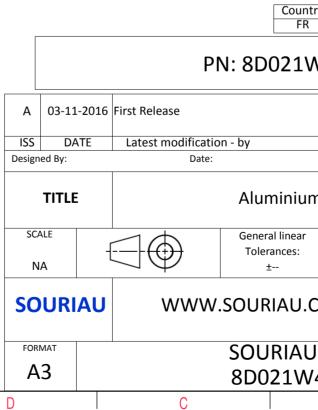

Φ		A				
				4		
AS EXAMPLE				3		
any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.)						
W42SCL						
	CUSTOMER I	DRAWING	MOD N°			
um Receptacle 8D series						
ar :	NPRDS / PROJECT 859					
COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
U DRG N°	1		SHEET			
N42SCL-C B		Α	1/2	J		

_	т	۵	н т	т	D		0	
		Contact Layout					Pai	nel Cutou
4		42					RE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc A B	2#4 Power 21-42 X Y 0 6.19 0 -6.19					ØA	т
ω							Dim ØA ØAA R1 ØT	
	L							
							SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional recor	oducts wh either of
N								Country FR
							PN: 8D	021W
					A ISS Designed		irst Release Latest modification - by Date:	
						TITLE		ninium
<u> </u>					SCALI			al linear ances:
					SOL	JRIAU	WWW.SOUR	IAU.C
					FORMA A3			RIAU 21W4
L	Н	G	F	E	D		C	

