

T	۵	п	m	<u>с</u>



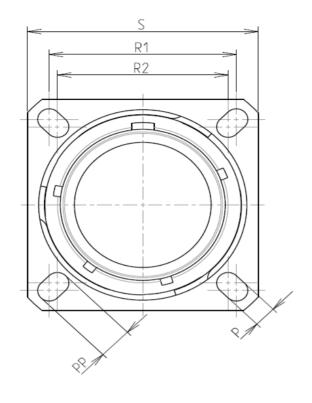



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 21

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium
-Shell Plating	: Olive drab Cadmium
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	65℃ to +175℃
-Salt Spray	: 500 hours

: 43.39 g ± 10%

8D 0

G

21

W

48

Ρ


F

Ν

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	31.75 29.36 39.7±0.3			
R2				
S				
V	20.07+0/-1.25			
W	2.1/3.2			
Z	31.5 Max			
VV THREAD	M31x1-6g			

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

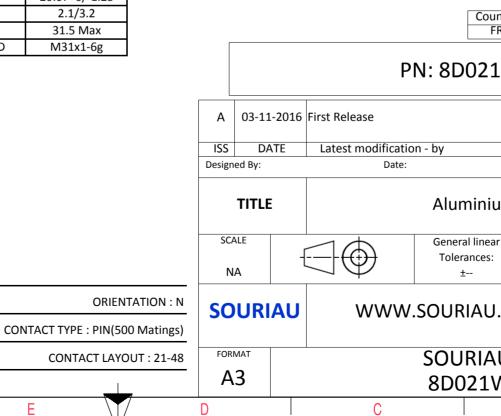

Φ				
			4	
S EXAMPLE			3	
any non-conformit which does not co or of the Parties or I adation, technical n untry Jurisc R 1W48PN	mply with by a third party		2	
		 MOD N°		
	CUSTOMER DRAWING			
um Receptac	le 8D series			
ar	NPRDS / PROJECT 859		1	
I.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission			
U DRG N°				
W48PN-C	A	1/2	J	
2				

$\begin{array}{c} & & & \\ & & \\ & & \\ & & \\ & & \\ & & \\ &$	ſ		۵	н т	т	D		0	
4 Image: Constraint of the second							S	QUARE FLANGE RECEPTACLE (TYPE	Panel Cuto
$ \begin{array}{c} \hline 1 \\ \hline 21.48 \\ \hline \hline Ctc \\ X \\ A \\ 4.57 \\ 4.57 \\ \hline B \\ 4.57 \\ \hline C \\ -4.57 \\ 4.57 \\ \hline D \\ -4.57 \\ 4.57 \\ \hline \end{array} $	4	×					ħ		
C 4.57 4.57 D 4.57 4.57 D 4.57 4.57 D 50URIAU shall not be liable for d a a use of the Product the Specifications issued by eith (professional recomment (PN: 8D02		Ctc A	21-48 X Y 4.57 4.57				× (
No	ω	С	-4.57 -4.57						ØA ØAA R1
N ► ► ► ► ► ► ► ► ► ►								due to a use of the Specifications issu	he Products v ued by either
	N								Coun FR
						A	03-11-201		
ISS DATE Latest modification - by Designed By: Date:							1		by
									Aluminiu
									General linear Tolerances: ±

F

Е

G

Н

SOURIAU	WWW.SOURIAU.

FORMAT		SOURIAL
A3		8D021W
D	С	

