

	т	D I	г т (m	0	1
]						



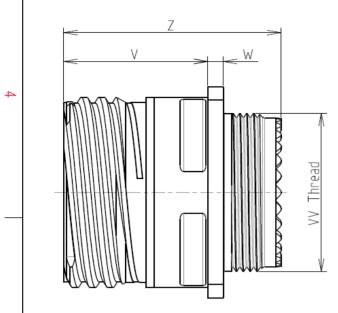

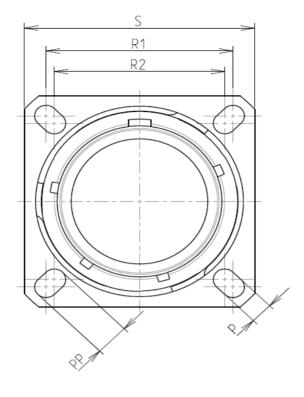

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 25

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Without Plating			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Sou	-Delivered with Souriau contacts and Accessories			
-Temperature Rang	e -65°C to +175°C			

: 2000 hours

: 44.4 g ± 10%

8D 0

G

25

Х

29

А

F

А

Connector dimension				
Dim	Nominal			
Р	3.91±0.2			
PP	6.15±0.2			
R1	38.1			
R2	34.93			
S	46±0.3			
V	20.07+0/-1.25			
W	2.1/3.2			
Z	31.5 Max			
VV THREAD	M37x1-6g			


ORIENTATION : A

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 25-29

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

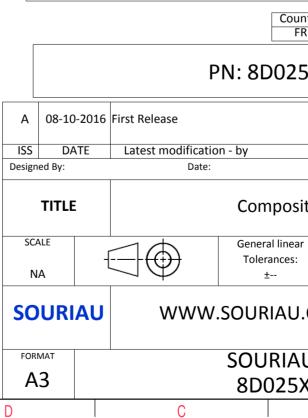

	Φ		A			
					4	
AS EX4	AMPLE				3	
any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.)						
untry FR	Jurisd	liction & Con Not Listed]	2	
5X29AA						
				MOD N°		
		CUSTOME	R DRAWING			
site	e Receptacle 8D series					
ar :	NPRDS / PROJECT 859					
	This document is the property of SOURIAU					
		it must not be reproduced or communicated without permission				
U I	DRG N°			SHEET		
X2	9AA-C			1/2	J	
	В		А			

