
1	ד Q T	m		0	œ	Þ	_
4	Z DEBUL						4
ω				LAYOUT SHOWN AS	EXAMPLE		3
	Keying Shown	as example					
	CHARACTERISTICS	Connector dimension					
	Standard : Based on MIL-DTL-38999 Series III	Dim Nominal ØS 25 Max					
2	-Shell Material : Aluminium -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)					
	Purability : 500 Mating cycles Pelivered with Souriau contacts and Accessories						
	-Temperature Range -65°C to +200°C		A 15-10-2016	First Release			
	-Salt Spray : 48 hours -Mass : 14.98 g ± 10%		ISS DATE	Latest modification - by		MOD N	v.
	191035 . 1 4 .30 g ± 10/0		Designed By:	Date:	CUSTO	MER DRAWING	
		TITLE	Aluminium Plug 8D series				
<u> </u>	BASIC SERIES: 8D 5 - 11 F 01 A D SHELL TYPE : Plug with RFI Shielding - 11 F 01 A D		SCALE -{- NA	General linear Tolerances: ±	NPR	DS / PROJECT 859	1
	CONTACT TYPE : Standard Crimp Contact ORIENTATION : D SHELL SIZE : 11 CONTACT TYPE : PIN(500 Matings)			SOURIAU This document is the property of SOURIAU it must not be reproduced or communicated without permission			
	PLATING : F = Nickel CONTACT LAYOUT : 11		FORMAT	SOURIAL		SHEET	
			A3		01AD-C	1/2	
				003111			

	т	G	нт — — — — — — — — — — — — — — — — — — —	т	U	0
		Contact Layout				
4		01				
		1#12 11-01	٦			
ω	Ctc A	X Y 0 0				
	-					SOURIAU shall not be liable for any due to a use of the Products wh
N						the Specifications issued by either of (professional recommendat Countr FR
					A 15-10-20 ISS DATE Designed By:	PN: 8D511F
_					TITLE SCALE NA	Alumin General linear Tolerances: ±
					FORMAT A3	U WWW.SOURIAU.C SOURIAU 8D511F0
l	Н	G	F	E	D	C

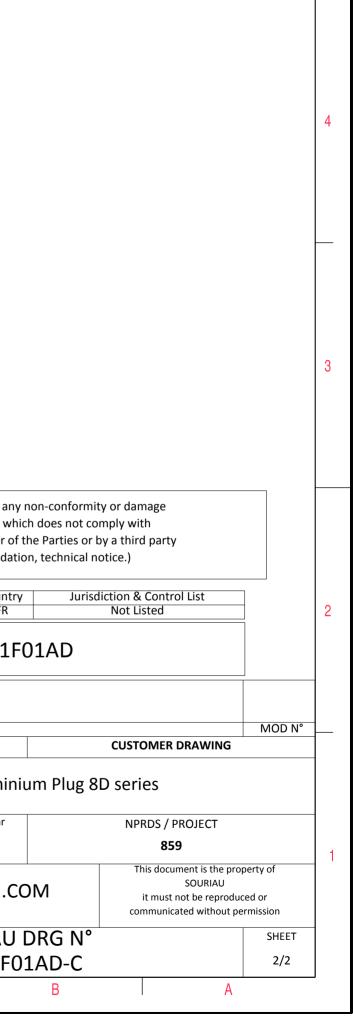

 \triangleright

σ