
Г	ى م	IT	m		0	Φ	A		
4						EYAMDIE		4	
					LAYOUT SHOWN AS	EXAMPLE			
		Keying Shown as	example						
	CHARACTERISTICS	F	Connector dimension Dim Nominal						
Z	-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Aluminium -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μ		ØS 25 Max Z 31 Max VV THREAD M15x1-6g		SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend Cour Fi	which does not comply w of the Parties or by a thi lation, technical notice.) htry Jurisdiction a	rith	2	
	 -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C 			PN: 8D511F01SC					
	-Salt Spray : 48 hours			A 15-10-2016					
	-Mass : 17.92 g ± 10%			ISS DATE Designed By:	Latest modification - by Date:	CUS	TOMER DRAWING		
				TITLE	Aluminium Plug 8D series				
_	BASIC SERIES: 8D 5 - SHELL TYPE : Plug with RFI Shielding	11 F 01 S C		SCALE -	General linear Tolerances: ±		PRDS / PROJECT 859		
	CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11		SOURIAU This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	PLATING : F = Nickel		FORMAT	FORMAT SOURIAU DRG N°					
	1			A3		F01SC-C	1/2		
	H G	l F	E	D	C	В	A		

		T	Q		т	т		D		0	
			Contact Layout								
4			01								
		[1#12 11-01								
ى		Ctc A	X	Y 0							
	-									SOURIAU shall not be	
2										due to a use of the the Specifications issue (professional i	ed by either of
								A 15-	10-2016 F	PN:	8D511
								ISS Designed By TIT		Latest modification - by Date:	y Alumin
<u> </u>								SCALE NA SOUF			General linear Tolerances: ±
		<u>н</u>	G		F	E		FORMAT A3		SC	OURIAU 8D511F(
		11	I G	I	Γ		\backslash		I	U	I

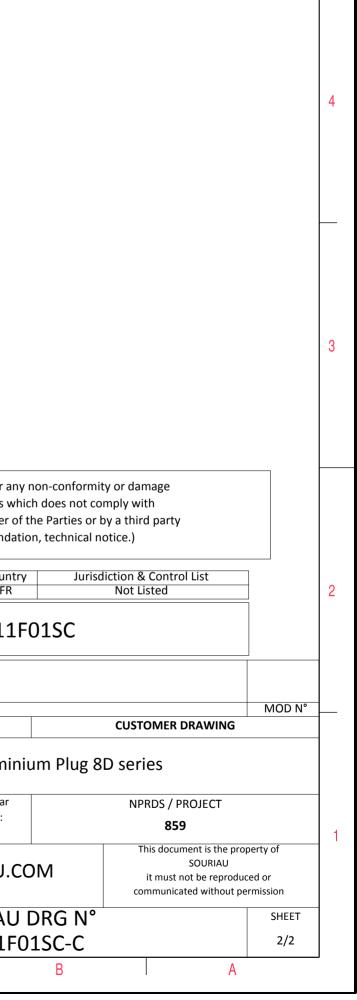

 \triangleright

σ