
	<b>الت</b>	m		0	<b>D</b>			
	ØS W						4	
↔				LAYOUT SH	OWN AS EXAMPLE		3	
	Keying Shown a	s example						
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III	F	Connector dimension Dim Nominal						
-Shell Material : Composite -Shell Plating : Olive drab Cadmium -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm min	inimum	ØS25 MaxZ'31.5 MaxVV THREADM15x1-6g		SOURIAU shall not be liable for any non-conformity or damage         due to a use of the Products which does not comply with         the Specifications issued by either of the Parties or by a third party         (professional recommendation, technical notice.)         Country       Jurisdiction & Control List         FR       Not Listed				
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories				PN: 8D511J02JA				
-Temperature Range : -65°C to +175°C			A 15-10-2016	5 First Release				
-Salt Spray : 2000 hours			ISS DATE	Latest modification - by		MOD N	N°	
			Designed By:	Date:		CUSTOMER DRAWING		
			TITLE	TITLE Composite Plug 8D series				
BASIC SERIES: 8D 5 - 5	11 J 02 J A		SCALE		eral linear erances: ±	NPRDS / PROJECT <b>859</b>		
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11		ORIENTATION : A		WWW.SOU	RIAU.COM	This document is the property of SOURIAU it must not be reproduced or		
PLATING : J = Olive drab Cadmium		CONTACT TYPE : SOCKET (1500 Matings) CONTACT LAYOUT : 11-02	-		JRIAU DRG N°	communicated without permission SHEET		
		CONTACT LATOUT : 11-02	A3					
		1		XI	D511J02JA-C	1/2		

			۵	н <b>г</b>	m	D	0
Image: Source of the second			Contact Layout				
Image: The state of the st	4	.x. (2)					
SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by ether- (professional recommend. PN: 8D512 A 15-10-2016 First Release ISS DATE Latest modification - by Designed By: Date: TITLE SOURIAU MWWW.SOURIAU.( TOMAT A3 SOURIAU		posit ID A B Shell Arrangement	(Insert arrangement 11-2)           act         Contact location           ion         X-axis         Y-axis           y-axis         (mm)         (mm)           +.095 (2.41)         +.000 (.00)          095 (2.41)         +.000 (.00)           Number of         Size         Service         Contact				
No No No No No No No No No No	ى ع						
N N N N N N N N N N N N N N		F					SOURIAU shall not be liable for a
PN: 8D511							due to a use of the Products w the Specifications issued by either of
A 15-10-2016 First Release ISS DATE Latest modification - by Designed By: Date: TITLE Comp SCALE A General linear Tolerances: NA COURIAU SOURIAU WWW.SOURIAU. FORMAT SOURIAU A3 SOURIAU	N					Г	Count FR
ISS       DATE       Latest modification - by         Designed By:       Date:         TITLE       Comp         SCALE       Image: Date:         NA       Image: Date:         SOURIAU       WWW.SOURIAU.         FORMAT       SOURIAU         A3       SDUTIAU							PN: 8D512
Designed By:     Date:       TITLE     Comp       SCALE     General linear       NA     Tolerances:       ±-     SOURIAU       FORMAT     SOURIAU       A3     SDURIAU							
SCALE NA SOURIAU FORMAT A3 SOURIAU A3 SOURIAU A3 SOURIAU A3 SOURIAU SOURIAU A3						Designed By:	Date:
NA Tolerances: <u>1</u>							
FORMAT SOURIAL A3 8D511J	<b>→</b>						-{
A3 8D511J						SOURIA	U WWW.SOURIAU.
	l	Н	G	F	E	1	

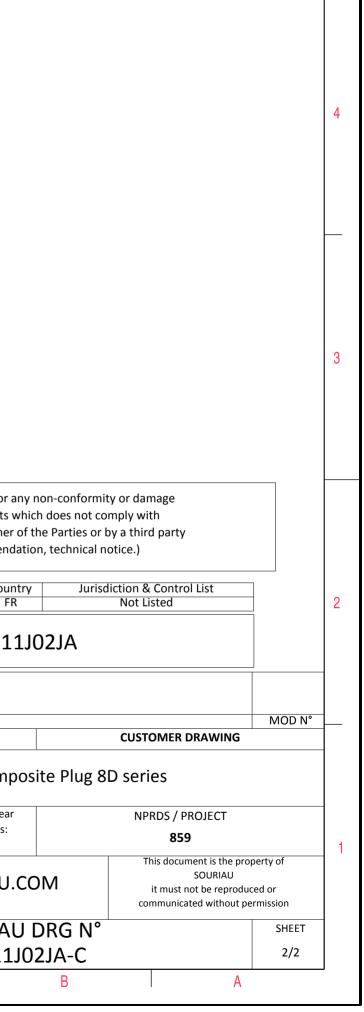

ω