

	т		G	ш	r	п	D	0	1
4			V Thread	ØS					
ω				Keying Shov	vn as example			LAYOUT SI	HOWN AS EXA
	CHARACTERISTICS				Connector of	dimension			
	Standard : Based on N	/IL-DTL-38999 Serie	es III		Dim ØS	Nominal 25 Max			
N	-Shell Material -Shell Plating -Insulator -Contacts -Seals & Grommet -Contact Plating -Durability -Delivered without Sou	: 500 Mating cycl	er er Alloy 0.8µm minimu	ım	Z' VV THREAD	31.5 Max M15x1-6g		SOURIAU shall not be I due to a use of the I the Specifications issued (professional rec PN: 8	Products which by either of th
	-Temperature Range -Salt Spray -Mass	 -65°C to +175°C 2000 hours 12 g ± 10% 						-2016 First Release TE Latest modification - by Date:	
<u> </u>	BASIC SERIES: SHELL TYPE : Plug wit	8D h RFI Shielding	5 - 11	J 04 P E	L	Delivered W/O Cont	SCALE NA	Ger	Composi leral linear lerances: ±
	CONTACT TYPE : Standard Crimp Contact ORIENTATION : E SHELL SIZE : 11 CONTACT TYPE : PIN(500 Matings)								
	PLATING : J =	Olive drab Cadmiur	n			CONTACT LAYOUT : 12	1-04 FORMAT A3		URIAU E 0511J04
l	Н		G	F			D	С	
						¥			

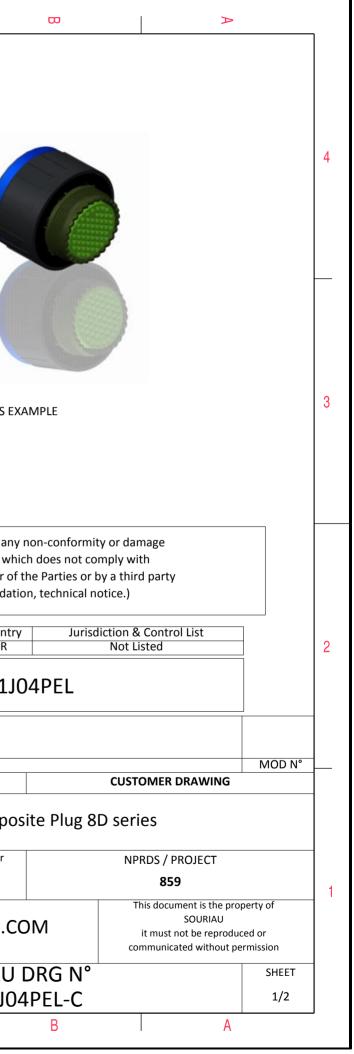

ſ		۵	וד	m	D	0
		Contact Layout				
4	×.	$ \begin{array}{c} $				
	Conta positio ID A B C D Shell Arrangement size no. conta 11 -4 4	X-axis (mm) Y-axis (mm) +0.65 (1.65) +.065 (1.65) +0.65 (1.65) 065 (1.65) -0.65 (1.65) 065 (1.65) -0.65 (1.65) +.065 (1.65) er of Size service Contacts rating location				
ω						
	1					
						SOURIAU shall not be liable for ar due to a use of the Products w the Specifications issued by either o (professional recommenda
М						Count FR PN: 8D511.
_					A 15-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
					TITLE	Compo
_					SCALE NA	General linear Tolerances: ±
					SOURIA	WWW.SOURIAU.
				_	FORMAT A3	SOURIAL 8D511J(
L	Н	G	F	E	D	C

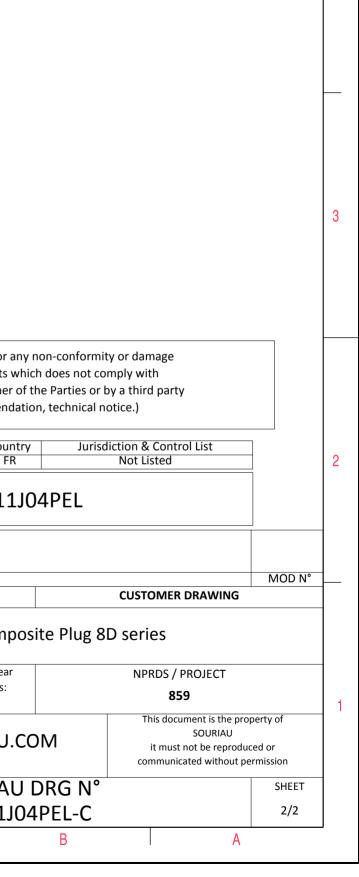

4