
| ר בר  | нт.<br>      | m                               | D |   | 0   | <b>₩</b>                        |   |           |  |
|---|--------------|---------------------------------|---|---|---|---------------------------------|---|-----------|--|
| L Z'  | ØS           |                                 |   |   |   |                                 |   |           |  |
| Δ   |              |                                 |   |   | LAYOUTS   | SHOWN AS EXAMPLE                |   | \$        |  |
|   | Keying Shown | as example                      |   |   |   |                                 |   |           |  |
| CHARACTERISTICS   | F            | Connector dimension Dim Nominal | 7 |   |   |                                 |   |           |  |
| Shell Material     : Composite       -Shell Material     : Composite       -Shell Plating     : Olive drab Cadmium       -Insulator     : Thermoplastic       -Contacts     : Copper Alloy       -Seals & Grommet     : Silicon Elastomer |              |                                 |   |   | SOURIAU shall not be liable for any non-conformity or damage<br>due to a use of the Products which does not comply with<br>the Specifications issued by either of the Parties or by a third party<br>(professional recommendation, technical notice.)<br>Country Jurisdiction & Control List<br>FR Not Listed |                                 |   |           |  |
| <ul> <li>Contact Plating : Gold over copper Alloy 0.8µm minimu</li> <li>Durability : 500 Mating cycles</li> <li>Delivered with Souriau contacts and Accessories</li> </ul>  | um           |                                 |   | FR         Not Listed         2           PN: 8D511J05JA         A         15-10-2016         First Release         2 |   |                                 |   |           |  |
| -Temperature Range : -65°C to +175°C  |              |                                 |   |   |   |                                 |   |           |  |
| -Salt Spray : 2000 hours  |              |                                 |   | ISS DATE Latest modification - by   |   | MO                              | DD N°   |           |  |
|   |              |                                 | D | Designed By:  | Date:   |                                 | CUSTOMER DRAWING  |           |  |
|   |              |                                 |   | TITLE Composite Plug 8D series  |   |                                 | D series  |           |  |
| BASIC SERIES:     8D     5     -     11       →     SHELL TYPE : Plug with RFI Shielding     5     -     11   | J 05 J A     |                                 |   | SCALE<br>NA   |   | neral linear<br>olerances:<br>± | NPRDS / PROJECT<br><b>859</b>   |           |  |
| CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11   |              |                                 |   | SOURIAU   | www.sou   | JRIAU.COM                       | This document is the property of<br>SOURIAU<br>it must not be reproduced or |           |  |
| PLATING : J = Olive drab Cadmium  |              | CONTACT TYPE : SOCKET (1        |   | FORMAT  |   | URIAU DRG N°                    | communicated without permission   | n<br>IEET |  |
| PLATING . J - UNVE UI AD CAUTHUTH   |              | CONTACT LA                      |   | A3  |   |                                 |   | 1/2       |  |
|   |              |                                 |   |   | X   | 3D511J05JA-C                    | 1   | L/Z I     |  |

| ſ        | Ŧ                                  | ۵   | וד | m |  | 0   |             |
|----------|------------------------------------|---|----|---|--|---|-------------|
|          |                                    | Contact Layout  |    |   |  |   |             |
| 4        | - <u>×</u>                         | $ \begin{array}{c} & & & \\ & $ |    |   |  |   |             |
|          | Shell Arrangement Numb<br>size no. | X-axis         Y-axis<br>(mm)           +0.65 (1.65)         +0.56 (1.42)           +.113 (2.87)        065 (1.65)           +.000 (0.00)        130 (3.30)          113 (2.87)        065 (1.65)          065 (1.65)         +.056 (1.42)  |    |   |  |   |             |
| cى       | 11 -5 5                            |   | ]  |   |  |   |             |
|          | -                                  |   |    |   |  | SOURIAU shall not be liable for<br>due to a use of the Products<br>the Specifications issued by eithe<br>(professional recommen | s w<br>er c |
| N        |                                    |   |    |   |  |   | unt<br>FR   |
|          |                                    |   |    |   | A 15-10-20<br>ISS DATE<br>Designed By: | PN: 8D51<br>D16 First Release<br>Latest modification - by<br>Date:  | L 1         |
|          |                                    |   |    |   | SCALE                                  | Com<br>General linea<br>Tolerances:   | ar          |
| <b>_</b> |                                    |   |    |   | SOURIA                                 |   |             |
|          |                                    |   |    |   | FORMAT<br>A3                           | SOURIA<br>8D511   |             |
|          | Н                                  | G   | F  | E | D                                      | C   |             |

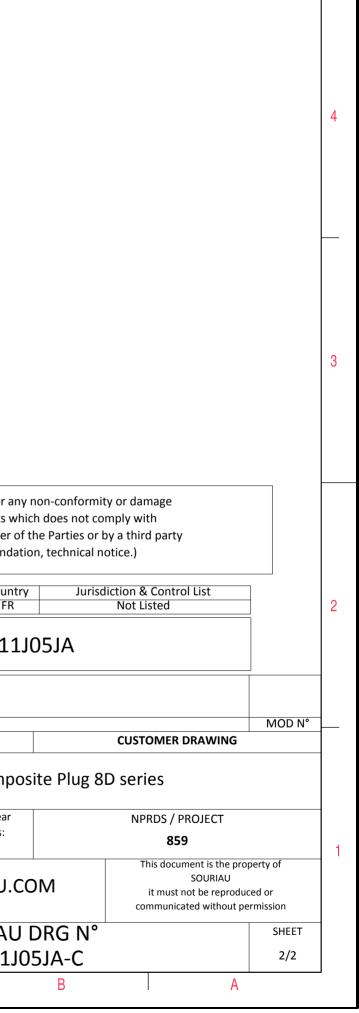

 $\triangleright$ 

σ