<u>م</u> ا			O		
	ØS				
CHARACTERISTICS	Keying Shown as example		LAYOUT SHOWN AS EXAMPLE		
 -Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Olive drab Cadmium -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum 		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed			
-Durability: 500 Mating cycles-Delivered with Souriau contacts and Accessories-Temperature Range: -65°C to +175°C-Salt Spray: 2000 hours		A 15-10-2016 Fir ISS DATE Designed By:	PN: 8D511J22HA rst Release Latest modification - by Date:	MOD N° CUSTOMER DRAWING	
		TITLE	Composite Plug		
BASIC SERIES: 8D 5 - 11 SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11	J 22 H A ORIENTA	ATION : A Matings)	General linear Tolerances: ± WWW.SOURIAU.COM	NPRDS / PROJECT 859 This document is the property of SOURIAU it must not be reproduced or communicated without permission	
	CONTACT LAYOL	UT : 11-22	SOURIAU DRG N	• SHEET	

	т	۵	гт —	m	D	0	
4	(Contact Layout 22*					
	Ctc	4#22D 11-22 X Y					
S	A B C D	1.905 1.905 1.905 -1.905 -1.905 -1.905 -1.905 1.905					
	-					SOURIAU shall not b due to a use of th the Specifications issue (professional	ne Products v ed by either
S						ĐN	Coun FR : 8D511
					A 15-10-201 ISS DATE Designed By:	L6 First Release Latest modification - b Date:	
					TITLE		Comp
_					SCALE NA		General linear Tolerances: ±
					FORMAT		OURIAU.

G

Н


F

Е

A3

D

С

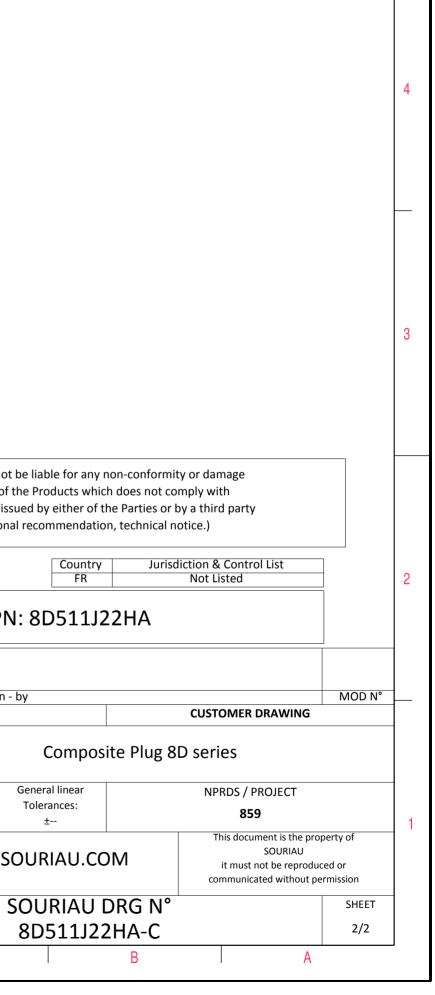

Þ

σ