
	m		0		A	
Z'	ØS					
	I		LAYO	DUT SHOWN AS EXAMPLE		
	Keying Shown as example					
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Olive drab Cadmium -Insulator : Thermoplastic	Connector dimensionDimNomØS25 MZ'31.5VV THREADM15x	nal lax Max	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)			
-Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm minimum					iction & Control List Not Listed	
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories			PN: 8D511J35BB			
-Temperature Range <u>-</u> -65°C to +175°C		A	16-10-2016 First Release			
-Salt Spray : 2000 hours - Mass : 16 g ± 10%		ISS Designe	DATE Latest modification d By: Date:	i - by	CUSTOMER DRAWING	MOD N°
			TITLE	Composite Plug 8	D series	
BASIC SERIES: 8D 5 - 11 J SHELL TYPE : Plug with RFI Shielding - 11 J	35 B B	SCAI NA		General linear Tolerances: ±	NPRDS / PROJECT 859 This document is the proper	ty of
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11	CONTACT TYPE : SC		URIAU WWW.S	SOURIAU.COM	SOURIAU it must not be reproduced communicated without perm	lor
PLATING : J = Olive drab Cadmium		ACT LAYOUT : 11-35		SOURIAU DRG N° 8D511J35BB-C		SHEET
H G	F E	D	C	B	A	-

	工	۵	н г	m		0
		Contact Layout				
4	*	$ \begin{array}{c} & & & & \\ & & & \\ & & $				
	2 +085 (2.16) 3 +138 (3.51) 4 +138 (3.51) 5 +085 (2.16) 6 +000 (0.00)	Contacts (Insert arrangement 11-35) orn Contact position ID X-axis (mm) Y-axis (mm) +146 (3.71) 8 -138 (3.51) -045 (1.14) +118 (3.00) 9 -138 (3.51) +045 (1.14) -045 (1.14) 10 -085 (2.16) +118 (3.00) -045 (1.14) 11 +000 (0.00) +056 (1.02) -118 (3.00) 12 +049 (1.24) -035 (0.89) -118 (3.00) 13 -049 (1.24) -035 (0.89) -118 (3.00) - - -				
	Shell Arrangement Nu size no. c	Applicable to MIL-DTL-38999 only) umber of Size Service Contact Supersedes contacts contacts rating location 13 13 22D M All MS27526-35				
ယ						
						SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommend
N						Coun FR
						PN: 8D511
					A 16-10-20 ISS DATE	016 First Release
					Designed By:	Date:
					TITLE	Comp
_					SCALE NA	General linear Tolerances:
					SOURIA	U WWW.SOURIAU.
					FORMAT	SOURIAU
	H	G	F	E	A3	8D511J
					V	

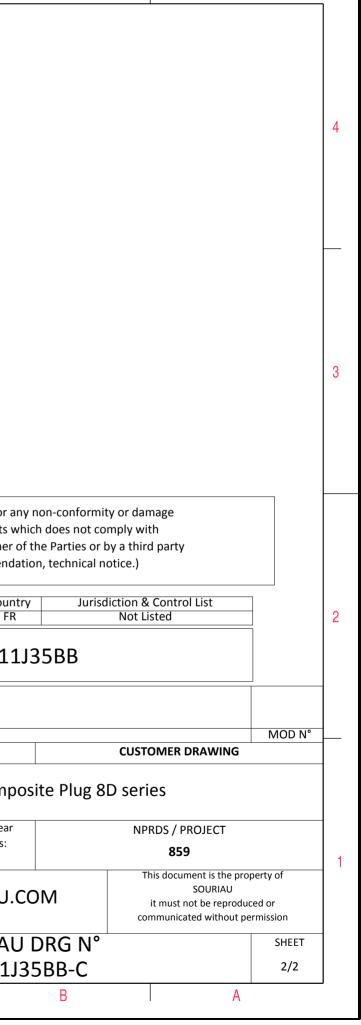

 \triangleright

σ