
<u>٦</u> ۵	т	m		0				
	N Thread							
ω				LA	YOUT SHOWN AS EXAMPLE			
CHARACTERISTICS	Keying Sh	own as example Connector dimension	1					
<ul> <li>-Standard : Based on MIL-DTL-38999 Series III</li> <li>-Shell Material : Composite</li> <li>-Shell Plating : Olive drab Cadmium</li> <li>-Insulator : Thermoplastic</li> <li>-Contacts : Copper Alloy</li> <li>-Seals &amp; Grommet : Silicon Elastomer</li> <li>-Contact Plating : Gold over copper Allop</li> </ul>	y 0.8µm minimum	DimNominalØS25 MaxZ'31.5 MaxVV THREADM15x1-6g		due to a use the Specifications	not be liable for any non-conformine of the Products which does not co s issued by either of the Parties or l ional recommendation, technical n Country Jurisc FR	omply with by a third party		
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessorie					PN: 8D511J98JN			
-Temperature Range <u>-</u> -65°C to +175°C -Salt Spray : 2000 hours				10-2016 First Release DATE Latest modificatio Date:		MOI CUSTOMER DRAWING	D N°	
			тіт	LE	Composite Plug 8D		series	
BASIC SERIES:     8D     5       →     SHELL TYPE : Plug with RFI Shielding	- 11 J 98 J M	N	SCALE NA		General linear Tolerances: ±	NPRDS / PROJECT 859		
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11		ORIEN CONTACT TYPE : SOCKET (150	TATION : N 00 Matings)	RIAU WWW	SOURIAU.COM	This document is the property of SOURIAU it must not be reproduced or communicated without permission		
PLATING : J = Olive drab Cadmium		CONTACT LAYO	DUT : 11-98		SOURIAU DRG N° 8D511J98JN-C	SHE 1/		
H G	F	E	D	С	В	A		

	Ŧ	្រា	п –	m		0	
4	-×	Contact Layout $A \oplus B \oplus $		<u>,                                     </u>			
	Cont positi II A B C C D E F Shell Arrangement Numb size no. conta	A         +.000 (0.00)         +.130 (3.30)           3         +.130 (3.30)         +.000 (0.00)           2         +.065 (1.65)        113 (2.87)           3        130 (3.30)         +.000 (0.00)           2        065 (1.65)        113 (2.87)           3        130 (3.30)         +.000 (0.00)           2         +.000 (0.00)         +.000 (0.00)	1				
S	size no. conta 11 -98 6						
	┡					SOURIAU shall not be liable for due to a use of the Products the Specifications issued by eithe	ts w
2						(professional recommer	ount FR
					A 16-10-20 ISS DATE Designed By:	16 First Release	
<b>_</b>					SCALE NA	Com General line Tolerances ±	ear
					FORMAT A3	U WWW.SOURIAL SOURIA 8D512	4U
	Н	G	F	E	D	C	

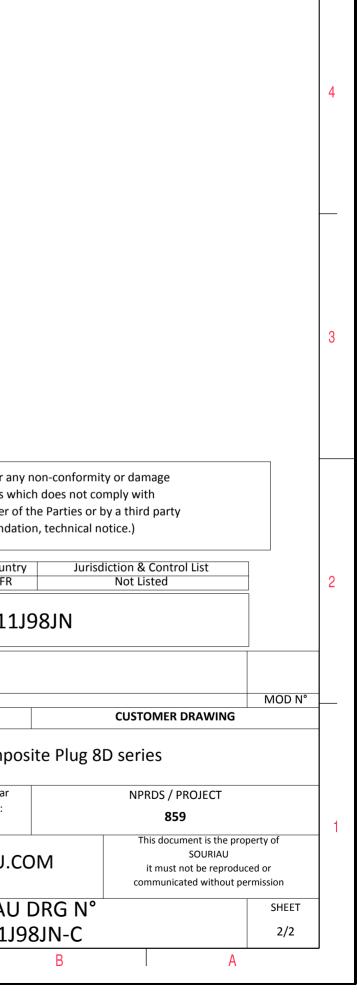

 $\triangleright$ 

σ