
	т	т		D	0	Δ	ב נ	>	
Z'	ØS								
	I				LA	YOUT SHOWN AS EXAMPLE	:		
	Keying Shown a	is example							
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Olive drab Cadmium		Connector dimensionDimNominalØS25 MaxZ'31.5 MaxVV THREADM15x1-6g	(due to a use	not be liable for any non-co of the Products which doe	s not comply with		
-Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer						s issued by either of the Par ional recommendation, tec	hnical notice.)		
-Contact Plating : Gold over copper Alloy 0.8µm minimum						Country FR	Jurisdiction & Control List Not Listed		
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories					I	PN: 8D511J99B	С		
-Temperature Range : -65°C to +175°C -Salt Spray : 2000 hours				A 16-	10-2016 First Release				
Mass : 15 g ± 10%				ISS Designed By:	DATE Latest modification Date:		CUSTOMER DRAWING	MOD N°	0
				ТІТ	LE	Composite P	Plug 8D series		
BASIC SERIES: 8D 5 - 11 J SHELL TYPE : Plug with RFI Shielding	99 B C			SCALE		General linear Tolerances: ±	NPRDS / PROJECT 859		
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11		CONTACT TYPE : SOCKI	RIENTATION : C	SOUR	RIAU WWW	SOURIAU.COM	This document is the SOURIAU it must not be repro communicated withou	duced or	
PLATING : J = Olive drab Cadmium			LAYOUT : 11-99	FORMAT A3		SOURIAU DRO 8D511J99BC	6 N°	SHEET 1/2	
			1	,			1	1/2	

-	Ŧ	۵	н т	т		0
		Contact Layout				
4	-×	$ \begin{array}{c} & & & \\ & & & \\ & & & \\ & & $				
	Conta positic ID A B C D E F G Shell Arrangement Numb size no.	N X-axis (mm) Y-axis (mm) +.065 (1.65) +.113 (2.87) +.130 (3.30) +.000 (0.00) +.065 (1.65) 113 (2.87) 065 (1.65) 113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 0065 (1.65) +.000 (0.00) 065 (1.65) +.000 (0.00)				
ω	11 -99 7					
	\vdash					SOURIAU shall not be liable for any due to a use of the Products wh
N						the Specifications issued by either of (professional recommendat
						PN: 8D511J
					A 16-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
					SCALE	General linear Tolerances:
					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D511J9
	Н	G	F	E \	D	C

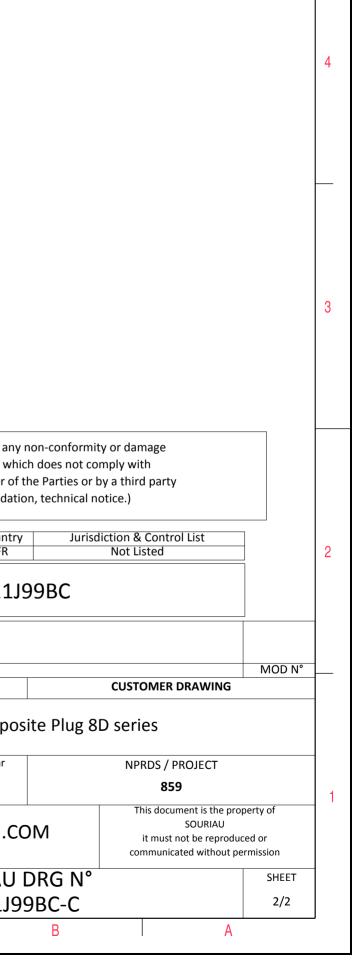

ω