
	т		G	п		т		D		C		
4		Z'	V Thread	ØS								
ى نى				Keying Sh	own as example					LAYOU	IT SHOWN AS I	ΞXA
	CHARACTERISTICS				Connecto	r dimension	1					
	Standard : Based on	MIL-DTL-38999 Series	; III		Dim ØS	Nominal 25 Max	1					
2	-Shell Material -Shell Plating -Insulator -Contacts -Seals & Grommet	: Composite : Olive drab Cadm : Thermoplastic : Copper Alloy : Silicon Elastomer			Z' VV THREAD	31.5 Max M15x1-6g				SOURIAU shall not due to a use of t the Specifications iss (professiona	he Products w ued by either c	vhich of th ation try
	-Contact Plating -Durability -Delivered with Souri -Temperature Range	: 500 Mating cycle au contacts and Acce									I: 8D511	
_	-Salt Spray - Mass	: 2000 hours : 11.8 g ± 10%						A 1 ISS Designed	DATE	First Release Latest modification - Date:	by	
									ITLE		Compo	osi
→	BASIC SERIES: 8D 5 - 11 J 99 P E SHELL TYPE : Plug with RFI Shielding - 11 J 99 P E							SCALE NA			General linear Tolerances: ±	
	CONTACT TYPE : Standard Crimp Contact ORIENTATION : E SHELL SIZE : 11 CONTACT TYPE : PIN(500 Matings)						SOU	IRIAU	WWW.SOURIAU.CO			
	PLATING : J =	Olive drab Cadmium					OUT : 11-99	FORMAT		S	OURIAU 8D511J	
	Н		G	F		E		D		С		
						V						



-	Ŧ	۵	н т	т	D	0
		Contact Layout				
4	-×	$ \begin{array}{c} & & & \\ & & & \\ & & & \\ & & $				
	Conta positi ID A B C D E F G Shell Arrangement Numb size no. conta	X-axis Y-axis (mm) (mm) +.065 (1.65) +.113 (2.87) +.130 (3.30) +.000 (0.00) +.065 (1.65) 113 (2.87) 065 (1.65) 113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 0065 (1.85) +.113 (2.87) +.000 (0.00) 000 (0.00)]			
ω	11 -99 7					
	-					SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendat Countr
S						PN: 8D511.
_					A 16-10-202 ISS DATE Designed By:	16 First Release Latest modification - by Date:
					SCALE	Compo General linear
-					SOURIAU	J WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D511J9
L	Н	G	F	E	D	C

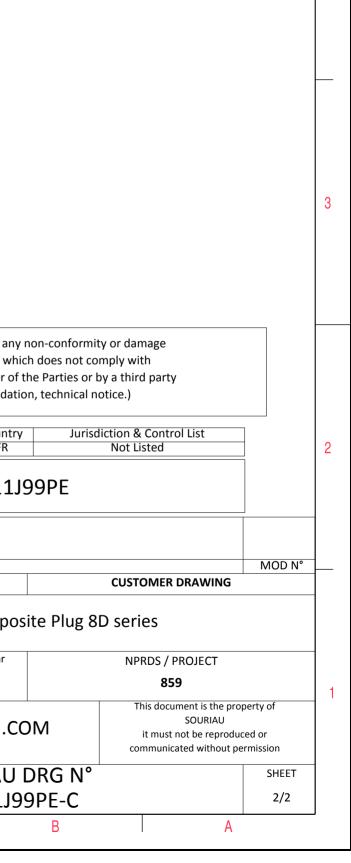

4