
ער בייער ביי רער בייער	וד	m	D	0			
Z'	25						
				LAY	OUT SHOWN AS EXAMPLE		
	Keying Shown as	s example					
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Nickel		Connector dimensionDimNominalØS25 MaxZ'31.5 MaxVV THREADM15x1-6g		due to a use o	ot be liable for any non-conformit of the Products which does not co issued by either of the Parties or l	omply with	
-Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer					onal recommendation, technical n		
-Contact Plating: Gold over copper Alloy 0.8μm minimum-Durability: 500 Mating cycles				DI	FR N: 8D511M01HC	Not Listed	
-Delivered with Souriau contacts and Accessories -Temperature Range <u>-65°C to +200°C</u>							
-Salt Spray : 2000 hours			ISS			MOD N°	
			Designed	By: Date:	Composite Plug 8	CUSTOMER DRAWING	
BASIC SERIES: 8D 5 - 11 M	01 H C		SCALE		General linear Tolerances:	NPRDS / PROJECT 859	
SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11		ORIENTATIO CONTACT TYPE : PIN (1500 Ma		JRIAU WWW.	± SOURIAU.COM	This document is the propert SOURIAU it must not be reproduced communicated without permi	or
PLATING : M = Nickel	L	CONTACT LAYOUT :			SOURIAU DRG N° 8D511M01HC-C		SHEET 1/2
			,				_, _

r	т	G	нт – – – – – – – – – – – – – – – – – – –	m		0	
		Contact Layout					
4	(01					
		1#12 11-01	1				
ω	Ctc A	X Y 0 0					
	L						
						SOURIAU shall not be liable for due to a use of the Products the Specifications issued by eithe (professional recommen	wh r of dat
C						PN: 8D511	
					A 16-10-20 ISS DATE Designed By:	016 First Release Latest modification - by Date:	
_					TITLE SCALE NA	Com General linea Tolerances:	ır
					SOURIA	U WWW.SOURIAU	
	Н	G	F	E	FORMAT A3	SOURIA 8D5111	U M
	11	u u	1 I				

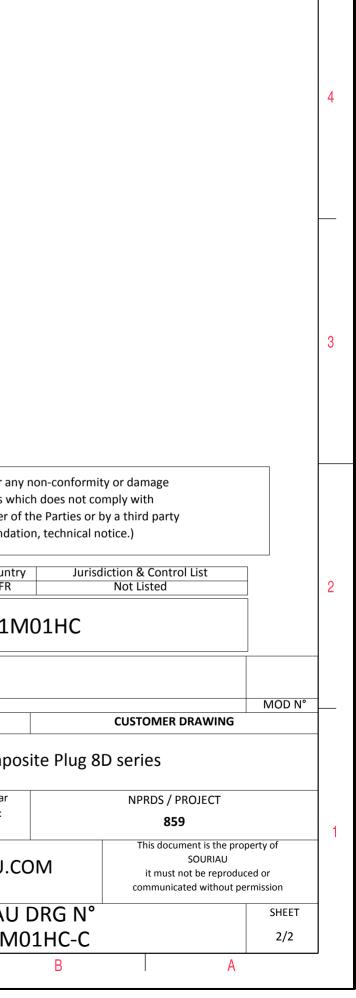

 \triangleright

σ