
T 0	т (п		0		Þ	7
A Z'	ØS					4
	Keying Shown as example		LAYOUT SHOWN AS EX	AMPLE		3
CHARACTERISTICS	Connector dimension	]				
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer	DimNominalØS25 MaxZ'31.5 MaxVV THREADM15x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)			
<ul> <li>Contact Plating : Gold over copper Alloy 0.8μm minimum</li> <li>Durability : 500 Mating cycles</li> <li>Delivered with Souriau contacts and Accessories</li> </ul>			FR Not Listed PN: 8D511M04BC			
-Temperature Range : -65°C to +200°C		A 16-10-20	016 First Release			
-Salt Spray : 2000 hours 		ISS DATE Designed By:	-		MOD N°	
			Date:	CUSTOMER DRAW	NG	_
		TITLE	TITLE Composite Plug 8D series			
→ BASIC SERIES: 8D 5 - 11 M SHELL TYPE : Plug with RFI Shielding	И 04 B C	SCALE	General linear Tolerances:	NPRDS / PROJEC <b>859</b>	Г	-
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11	ORIEN CONTACT TYPE : SOCKET(50	ITATION : C SOURIA	U WWW.SOURIAU.C	This document is t SOURI. it must not be re communicated with	AU produced or	
PLATING : M = Nickel	CONTACT LAY		SOURIAU		SHEET	_
		A3	8D511M		1/2	

-	T	Q	П	m		0	
		Contact Layout					
4	.×.	$ \begin{array}{ccc}  & & & \\  & & & &$					
	Conta positic ID A B C C D Shell Arrangement Numb size no.	X-axis         Y-axis (mm)           +0.65 (1.65)         +0.05 (1.65)           +0.05 (1.65)         -0.05 (1.65)           -0.05 (1.65)         -0.05 (1.65)           -0.05 (1.65)         +0.05 (1.65)           -0.05 (1.65)         +0.05 (1.65)           -0.05 (1.65)         +0.05 (1.65)           -0.05 (1.65)         +0.05 (1.65)           -0.05 (1.65)         +0.05 (1.65)           -0.05 (1.65)         +0.05 (1.65)	]				
ω	11 -4 4	i 20 I Ali MS20050-4					
	-					SOURIAU shall not be liab due to a use of the Pro the Specifications issued by	ducts w
N						(professional recor	mmenda Count FR
					A 16-10-20 ISS DATE Designed By:	116 First Release	
-					TITLE SCALE NA	Genera Toler	Compo al linear ances: :
					FORMAT A3	SOU	
L	Н	G	F	E	D	C C	
					¥		

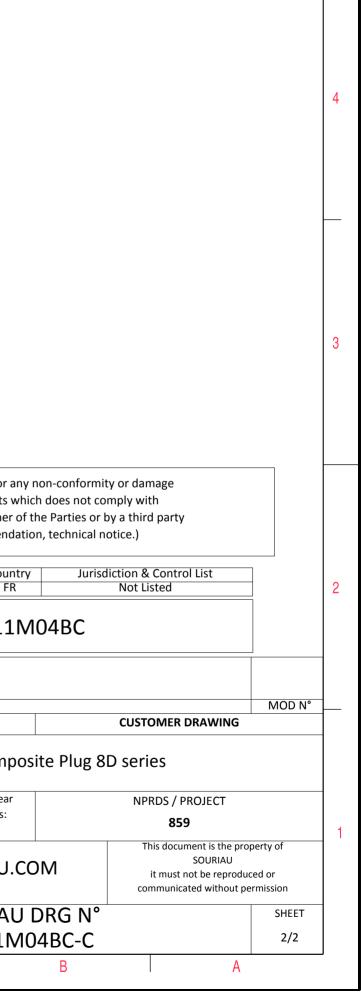

 $\triangleright$ 

σ