
	т	۵ ا	<del>ال</del> ت	m	τ	<b>D</b>	C	
4			ØS					
			VV Thread					
ယ							LAYOUT SH	IOWN AS EXA
			Keying Sho	wn as example				
	CHARACTERISTICS			Connector dimension				
	-Standard : Based on MII 	-DTL-38999 Series III Composite		DimNominalØS25 Max				
	-Shell Plating -Insulator	Nickel Thermoplastic		Z' 31.5 Max VV THREAD M15x1-6g			SOURIAU shall not be lia due to a use of the P the Specifications issued l (professional rec	roducts whicl by either of th
		Copper Alloy Silicon Elastomer						
N		Gold over copper Alloy 0.8µm n	ninimum					Country FR
		500 Mating cycles						D511M
	-Delivered with Souriau o						FIN. OI	
		-65°C to +200°C				A 16-10-2016	6 First Release	
		2000 hours 12.6 g ± 10%			-	ISS DATE	Latest modification - by	
					-	Designed By:	Date:	
						TITLE		Composi
	BASIC SERIES:	8D 5 -	11 M 05 P N			SCALE		eral linear erances:
<b>→</b>	SHELL TYPE : Plug with RFI Shielding							±
	CONTACT TYPE : Standard Crimp Contact ORIENTATION : N   SHELL SIZE : 11 CONTACT TYPE : PIN(500 Matings)					SOURIAU	WWW.SOU	/W.SOURIAU.CO
	PLATING : M = Ni	ckel			AYOUT : 11-05	FORMAT		JRIAU [
			I			A3		511M0
L	Н	G	F	E		D	C	
					V			



r	Ŧ	۵	н <b>г</b>	m		0
		Contact Layout				
4	-×_	$ \begin{array}{c} & & & \\ & $				
	Conta positi ID A B C D E Shell Arrangement size no. conta 11 -5 5	X-axis   Y-axis (mm)     +065 (1.65)   +056 (1.42)     +.113 (2.87)  065 (1.65)     +.000 (0.00)  130 (3.30)    113 (2.87)  065 (1.65)    065 (1.65)   +.056 (1.42)     er of   Size   Service     contacts   rating   Location				
ω			-			
	+					SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o
N						(professional recommenda
					A 16-10-20 ISS DATE Designed By:	016 First Release Latest modification - by Date:
_ <b>-</b>					TITLE SCALE NA	Comp General linear Tolerances: ±
					FORMAT A3	U WWW.SOURIAU. SOURIAU 8D511N
l	Н	G	F	E	D	

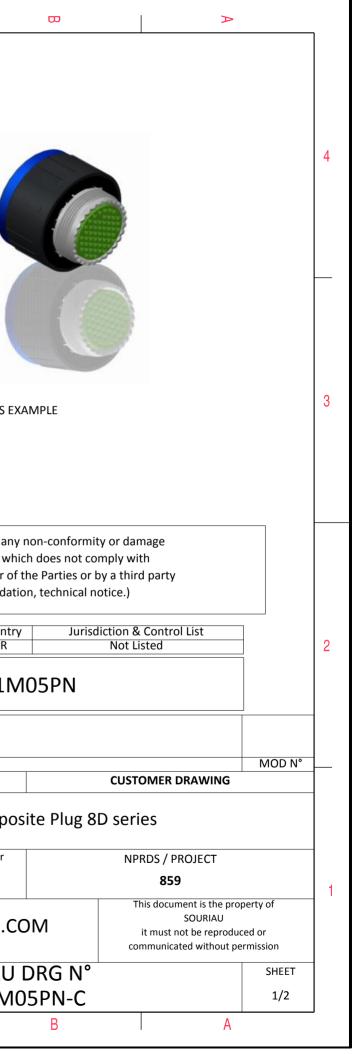