
T G	ח יי		0	œ	Þ	
A	ØS					
			LAYOUT SH	OWN AS EXAMPLE		
	Keying Shown as example					
CHARACTERISTICS						
-Standard : Based on MIL-DTL-38999 Series III	Connector of Dim	limension Nominal				
-Shell Material : Composite	ØS	25 Max				ŀ
-Shell Plating : Nickel	Z' VV THREAD	31.5 Max M15x1-6g	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with			
-Insulator : Thermoplastic	VV IIIILAD	MISKI 05	the Specifications issued	by either of the Parties or by a third		
-Contacts : Copper Alloy			(professional rec	ommendation, technical notice.)		
-Seals & Grommet : Silicon Elastomer				Country Jurisdiction &	Control List	
-Contact Plating : Gold over copper Alloy 0.8μm minimum				FR Not Lis		
-Durability : 500 Mating cycles						
-Delivered with Souriau contacts and Accessories			PN: 8	D511M05SN		
-Temperature Range : -65°C to +200°C						
-Salt Spray : 2000 hours		A 16	-10-2016 First Release			
Mass : 15.8 g ± 10%		ISS Designed B	DATE Latest modification - by	CUSTO		۷°
			LE Date: CUSTOMER DRAWING			
		11		Composite Plug 8D serie	25	
	VI 05 S N	SCALE		ral linear NPR erances: ±	DS / PROJECT 859	
SHELL TYPE : Plug with RFI Shielding					is document is the property of	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11	CONTACT	ORIENTATION : N TYPE : SOCKET(500 Matings)	RIAU WWW.SOU		SOURIAU t must not be reproduced or nmunicated without permission	
		CONTACT LAYOUT : 11-05		JRIAU DRG N°	SHEET	
I DIATING · M - Nickol		CONTACT LATUUT . 11-05	500	או מאת מאות	JILLI	
PLATING : M = Nickel	ł	A3	00	511M05SN-C	1/2	1

-	Ŧ	۵	וד	m	D	0	
		Contact Layout					
4	- <u>×</u>	$ \begin{array}{c} \bullet \\ \bullet $					
	Conta positio ID A B C C D E Sheli Arrangement size no. kumb	X-axis (mm) Y-axis (mm) +.0.65 (1.65) +.0.56 (1.42) +.113 (2.87) 065 (1.65) +.000 (0.00) 130 (3.30) 113 (2.87) 065 (1.65) 005 (1.65) +.056 (1.42) er of Size Service Contact Supersedes acts contacts rating location Supersedes					
ω	11 -5 5	20 I All MS20050-5	1				
	-					SOURIAU shall not be liab due to a use of the Pro the Specifications issued by	oducts w
N						(professional recor PN: 8D	Count FR
					A 16-10-20 ISS DATE Designed By:	116 First Release Latest modification - by Date:	
-					SCALE NA	General General Toler	Comport ral linear rances: ±
					FORMAT A3	SOU	
L	Н	G	F	E	D	С	

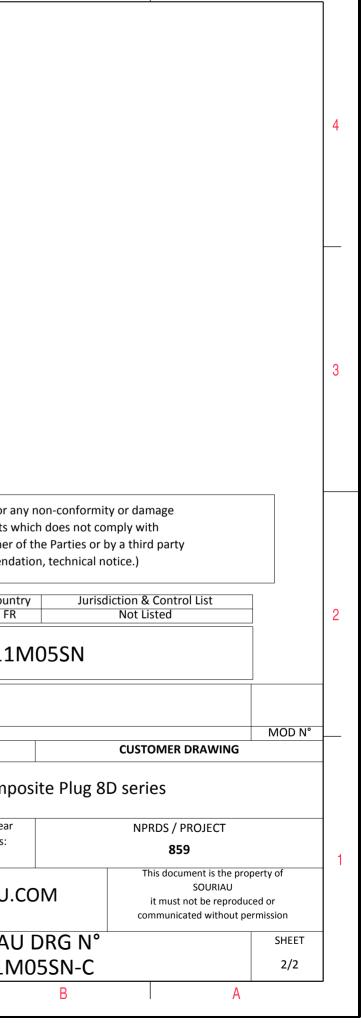

 \triangleright

σ