
			0			
S	Keying Shown as example		LAY	YOUT SHOWN AS EXAMPLE		
CHARACTERISTICS	Connector dimension					
<ul> <li>-Standard : Based on MIL-DTL-38999 Series III</li> <li>-Shell Material : Composite</li> <li>-Shell Plating : Nickel</li> <li>-Insulator : Thermoplastic</li> <li>-Contacts : Copper Alloy</li> <li>-Seals &amp; Grommet : Silicon Elastomer</li> <li>-Contact Plating : Gold over copper Alloy 0.8µm minimum</li> </ul>	DimNominalØS25 MaxZ'31.5 MaxVV THREADM15x1-6g		due to a use the Specifications	not be liable for any non-conform of the Products which does not issued by either of the Parties o onal recommendation, technical Country Juri FR	comply with r by a third party	
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories			PN: 8D511M98HN			
-Temperature Range : -65°C to +200°C		A	17-10-2016 First Release			
-Salt Spray : 2000 hours		ISS Designe	DATE Latest modificatio	n - by	CUSTOMER DRAWING	MOD N°
	TITLE Composite Plug 8D series				8D series	
BASIC SERIES: 8D 5 - 11 M SHELL TYPE : Plug with RFI Shielding	98 H N			General linear Tolerances: ±	NPRDS / PROJECT 859 This document is the pro	perty of
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11			URIAU WWW	SOURIAU.COM	SOURIAU it must not be reproduc communicated without pe	
PLATING : M = Nickel		AYOUT : 11-98		SOURIAU DRG N 8D511M98HN-C	>	SHEET 1/2
H G	F E	D	С	В	Α	

	Ŧ	្រា	<b>п</b>	m		0	
		Contact Layout					
4	-×(	$ \begin{array}{c} E \bigoplus & F & \bigoplus \\ D & \bigoplus & C \\ \hline & & & & \\ \hline & & & & \\ \hline & & & & \\ \hline & & & &$					
	Shell Arrangement Numb size no. 11 Shell Arrangement Numb	Lact Ison         Contact location           X-axis         Y-axis (mm)           x         +000 (0.00)           x         +130 (3.30)           x         +130 (3.30)           x         +006 (1.65)           x         +066 (1.65)           x         +066 (1.65)           x         +066 (1.65)           x         +000 (0.00)           x         +000 (0.00)					
ယ							
	-					SOURIAU shall not be liab	
2						due to a use of the Pro the Specifications issued by (professional reco	y either c
					A 17-10-20 ISS DATE	PN: 8D	)511N
					Designed By: TITLE	Date:	Compo
<b>_</b>					NA		rances: ±
			1		FORMAT A3		IRIAU 511M
	Н	G	l F	E	D	C	

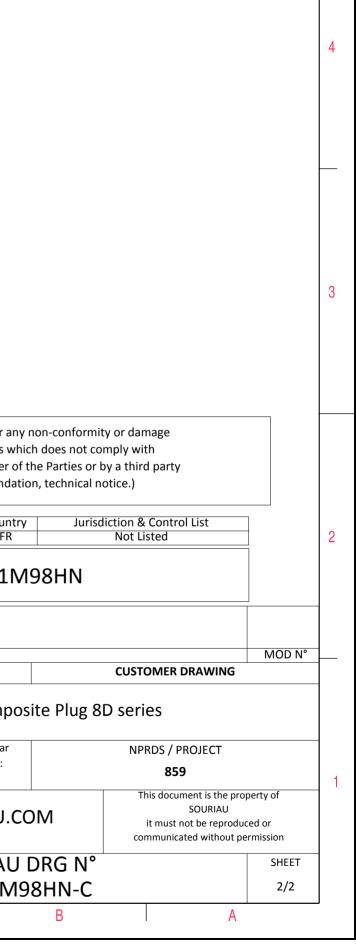

 $\triangleright$ 

σ