	ш (г		0	Ω	A	
	Sand Sand Sand Sand Sand Sand Sand Sand		LAYOUT SHOWN AS	EXAMPLE		
	Keying Shown as example					
CHARACTERISTICS  -Standard : Based on MIL-DTL-38999 Series III	Connector dimension Dim Nominal	}				
-Shell Material : Aluminium -Shell Plating : Olive drab Cadmium -Insulator : Thermoplastic -Contacts : Copper Alloy	ØS25 MaxZ31 MaxVV THREADM15x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)			
-Seals & Grommet : Silicon Elastomer			Cour		List	
-Contact Plating: Gold over copper Alloy 0.8μm minimum-Durability: 500 Mating cycles			FR Not Listed			
-Delivered with Souriau contacts and Accessories			PN: 8D511W22BB			
-Temperature Range : -65°C to +175°C		A 17-10-201	I6 Eirst Paleaco			
-Salt Spray : 500 hours						
Mass : 16.89 g ± 10%		ISS DATE Designed By:	Latest modification - by Date:	CUSTOMER D	MOD N° RAWING	
		TITLE	Aluminium Plug 8D series			
		SCALE	General linear	NPRDS / PR		
BASIC SERIES: 8D 5 - 11 W 22 SHELL TYPE : Plug with RFI Shielding	2 B B	NA	Tolerances:	859		
CONTACT TYPE : Standard Crimp Contact					ent is the property of	
			SOURIAU WWW.SOURIAU.COM it must not be reproduced without		ot be reproduced or	
				communicate	eu without permission	
SHELL SIZE : 11	CONTACT TYPE : SOCKET(5)		COLIDIAL		CHEET	
	CONTACT TYPE : SOCKET(5)			J DRG N° V22BB-C	SHEET	

r	Ŧ	۵	г	m		0	
4		Contact Layout 22*					
ω	Ctc A B C D	X       Y         1.905       1.905         1.905       -1.905         -1.905       -1.905         -1.905       1.905					
						SOURIAU shall not be due to a use of the the Specifications issued (professional re	Products w by either
N					A 17-10-2016	<b>PN: 8</b> 6 First Release	Coun FR 3D511
					ISS DATE Designed By: TITLE SCALE		Alumi neral linear olerances:
<u> </u>					NA SOURIAU FORMAT		JRIAU.

G

Н


F

Е

A3

D

С

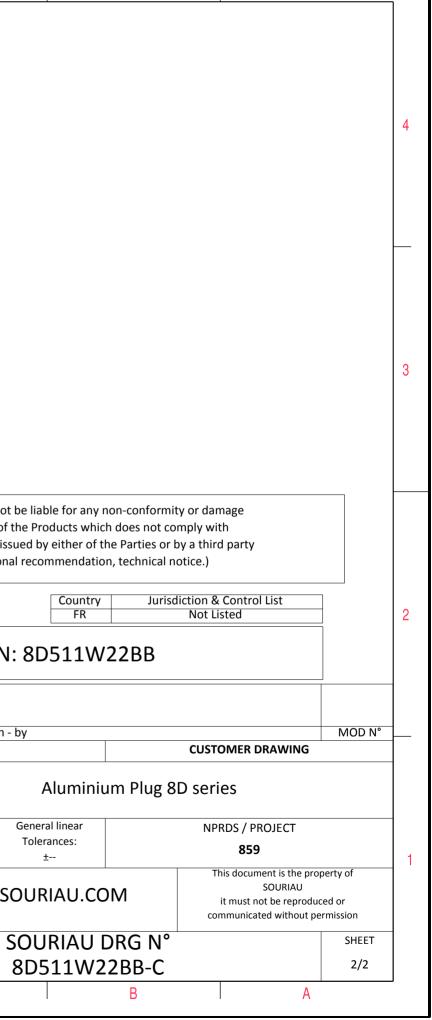

 $\triangleright$ 

σ