	т <u>Ω</u> т	m		0	₩ >		
4	Z D D D D D D D D D D D D D						4
ω				LAYOUT SHOWN AS EXAI	MPLE		3
	Keying Show	n as example					
	CHARACTERISTICS	Connector dimension					
	Standard : Based on MIL-DTL-38999 Series III	Dim Nominal ØS 25 Max					
	-Shell Material: Aluminium-Shell Plating: Olive drab Cadmium-Insulator: Thermoplastic-Contacts: Copper Alloy-Seals & Grommet: Silicon Elastomer	ØS25 MaxZ31 MaxVV THREADM15x1-6g	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)				
N	-Contact Plating : Gold over copper Alloy 0.8µm minimum	Country Jurisdiction & Control List					2
	-Durability : 500 Mating cycles -Delivered without Souriau contacts						
	-Temperature Range : -65°C to +175°C -Salt Spray : 500 hours		A 18-10-2016	First Release			
	-Salt Spray : 500 hours -Mass : 14.19 g ± 10%		ISS DATE	Latest modification - by		MOD N°	
	_		Designed By:	Date:	CUSTOMER DRAWING		_
			TITLE	Aluminiu	m Plug 8D series		
<u> </u>	BASIC SERIES: 8D 5 - 11 W 22 P D SHELL TYPE : Plug with RFI Shielding - 11 W 22 P D	L Delivered W/O Contacts	SCALE	General linear Tolerances:	NPRDS / PROJECT 859		-
	CONTACT TYPE : Standard Crimp Contact ORIENTATION : D			This document is the property of		perty of	_ '
	SHELL SIZE : 11 CONTACT TYPE : PIN(500 Matings)			J WWW.SOURIAU.COM it must not be reproduced or communicated without permission			
	PLATING : W = Olive drab Cadmium CONTACT LAYOUT : 11-		FORMAT	SOURIAU D		SHEET	_
	I	1	A3	8D511W22		1/2	
ļ	H G F	E	D	C	B A		

-	I	۵	г п	m			0	
4		Contact Layout 22*						
ω	Ctc A B C D	X Y 1.905 1.905 1.905 -1.905 -1.905 -1.905 -1.905 1.905						
	_						the Specifications is	f the Products v
N							PN	Coun FR : 8D511\
_					A ISS Design	DATE	5 First Release Latest modification Date:	- by
<u> </u>					SC/	A		Alumi General linear Tolerances: ±
					FORI			SOURIAU. SOURIAU 8D511W


G

Н

F

Е

D

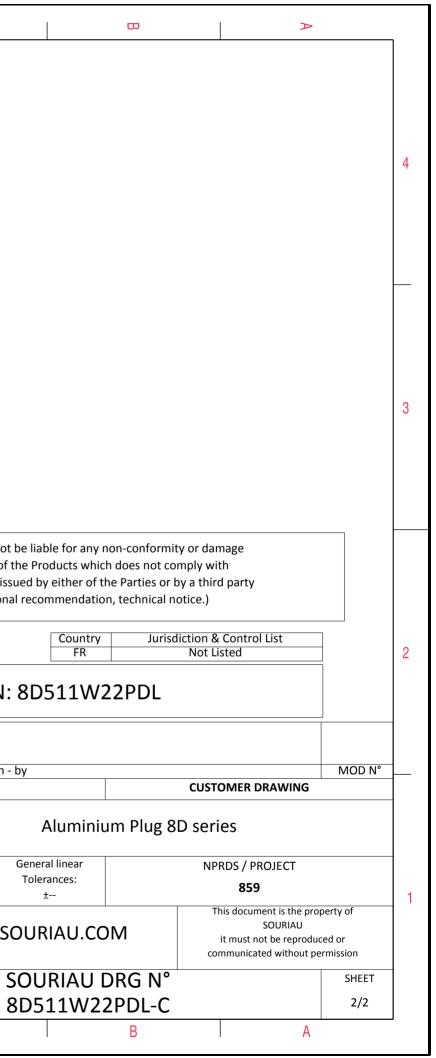

С