ב ב	г	п	D		0		A	
	ØS							
					LAYO	UT SHOWN AS EXAMPLE		
	Keying Shown as	example						
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite		Connector dimensionDimNominalØS29.4 Max		[· · · · · · · · · · · · · · · · · · ·	1	
-Shell Plating : Olive drab Cadmium -Insulator : Thermoplastic -Contacts : Copper Alloy	2 31.5 Max : Olive drab Cadmium VV THREAD : Thermoplastic VV THREAD . Thermoplastic VV THREAD							
-Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm minimum				L		Country Juris FR	diction & Control List Not Listed	
-Durability : 500 Mating cycles -Delivered without Souriau contacts				PN: 8D513J03SBL				
-Temperature Range : -65°C to +175°C			A	A 17-10-2016	First Release			
-Salt Spray : 2000 hours				S DATE	Latest modification Date:	- by	CUSTOMER DRAWING	MOD N°
				TITLE		Composite Plug 8	3D series	
BASIC SERIES: 8D 5 - 13 J	J 03 S B L	Delivered W/0		SCALE		General linear Tolerances: ±	NPRDS / PROJECT 859	
CONTACT TYPE : Standard Crimp Contact		ORIEN	TATION : B	OURIAU	WWW.S	OURIAU.COM	This document is the pro SOURIAU it must not be reprodu	iced or
		CONTACT TYPE : SOCKET(50					communicated without p	
SHELL SIZE : 13 PLATING : J = Olive drab Cadmium		CONTACT LAYO	UT:13-03 ^F	ORMAT		SOURIAU DRG N°		SHEET

	т	۵	т	т		0	
		Contact Layout			1		
4		03 () () () () () () () () () () () () ()					
	Ctc A B	3#16 13-03 X Y 2.39 1.47 0 -2.79 2.20 1.47					
ယ	C	-2.39 1.47					
	F						
						SOURIAU shall not be lia due to a use of the P the Specifications issued I (professional rec	Products w by either
N							Coun FR
					A 17-10-2016	PN: 8	D513
					ISS DATE Designed By:	Latest modification - by Date:	
					TITLE		Comp
_					SCALE . NA		eral linear erances: ±
					SOURIAU	WWW.SOU	RIAU.
					FORMAT	SOL	JRIAL

G

Н


F

Е

A3

D

С

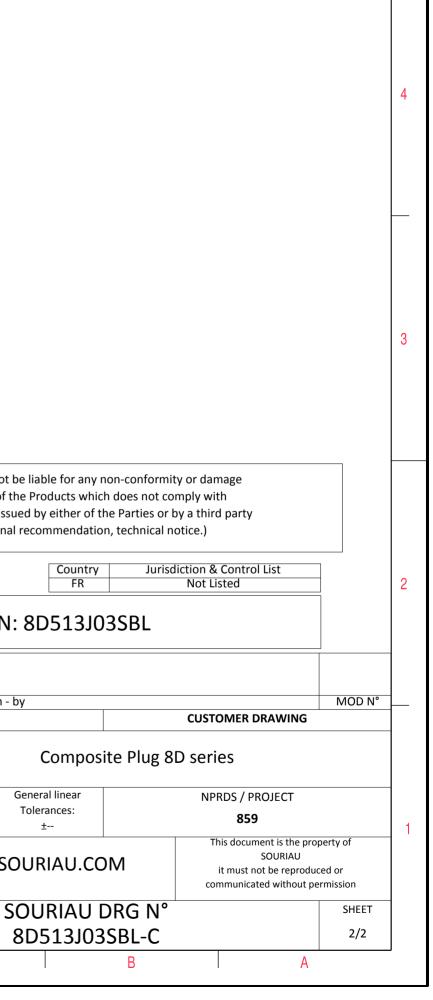

 \triangleright

σ