
	н г	m		0			
	ØS						
				LAYOUT SH	IOWN AS EXAMPLE		
	Keying Shown a	is example					
CHARACTERISTICS	F	Connector dimension					
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer		DimNominalØS35.7 MaxZ'31.5 MaxVV THREADM25x1-6g		due to a use of the F the Specifications issued		y with third party	
-Contact Plating : Gold over copper Alloy 0.8μm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories				PN: 8	D517M08HE		
-Temperature Range : -65°C to +200°C				0-2016 First Release			
-Salt Spray : 2000 hours				ATE Latest modification - by Date:	c	MC USTOMER DRAWING	DD N°
	TITLE Composite Plug 8D series		eries				
BASIC SERIES: 8D 5 - 17 M SHELL TYPE : Plug with RFI Shielding	08 H E		SCALE		eral linear lerances: ±	NPRDS / PROJECT 859	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 17		ORIENTATION CONTACT TYPE : PIN (1500 Mating	- SOUR	IAU WWW.SOU	RIAU.COM	This document is the property of SOURIAU it must not be reproduced or communicated without permissior	
PLATING : M = Nickel		CONTACT THE PHN (1500 Mating			URIAU DRG N°	SH	HEET
			I AS	I 8D	517M08HE-C	1	1/2

_	т	۵	г	m	D	0	
		Contact Layout					
4	-x ($ \begin{array}{c} $					
	Cont position A B C C D E F	Contacts Location X-axis Y-axis X-axis (mm) (mm) +.000 (0.00) +.236 (5.99) +.128 (3.25) +.086 (2.18) +.230 (5.84) 078 (1.98) +.094 (2.39) 216 (5.49) 094 (2.39) 216 (5.49)					
۵	Shell Arrangement Nuc co	128 (3.25) +.086 (2.18)					
						SOURIAU shall not be lial due to a use of the Pro the Specifications issued by (professional reco	oducts w y either c
27						PN: 8D	Count FR 05171
					ISS DATE	016 First Release Latest modification - by	
					Designed By:		Compo
_					SCALE		ral linear rances: ±
					SOURIA		
					FORMAT A3		JRIAL 517N
L	Н	G	F	E	D	C	

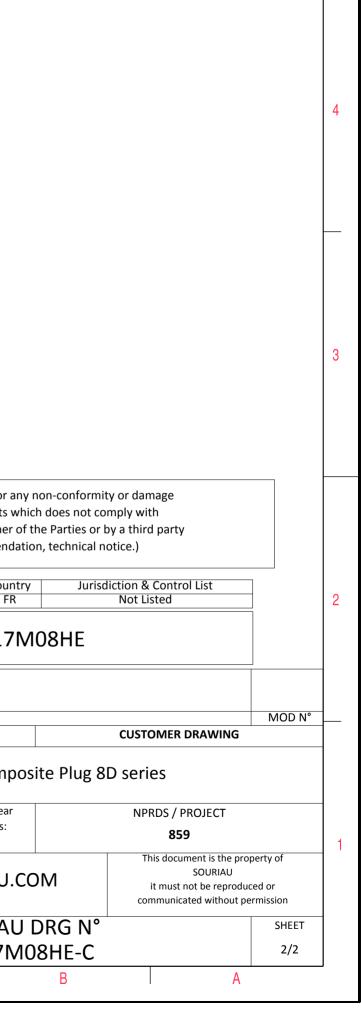

 \triangleright

σ