
	т		G		П		т		D		C		
4		Z '		1 1 1									
ယ											LAYOU	T SHOWN	AS EXA
					Keying Show	vn as example							
	CHARACTERISTICS				Keying Show			_					
	-Standard : Based on	MIL-DTL-38999 Seri	es III			Connecto Dim	or dimension Nominal	-					
2	-Shell Material -Shell Plating -Insulator -Contacts -Seals & Grommet -Contact Plating -Durability -Delivered with Souria	: 500 Mating cycl au contacts and Acc	er Alloy 0.8µm mir es essories	nimum		ØS Z' VV THREAD	35.7 Max 31.5 Max M25x1-6g				SOURIAU shall not f due to a use of t the Specifications issu (professional PN :	he Product ued by eith I recomme	ts which her of th endation buntry FR
	-Temperature Range -Salt Spray	 -65°C to +200°C 2000 hours 	-						A 17-	10-2016	First Release		
	-Mass	: 24.9 g ± 10%							ISS Designed By	DATE :	Latest modification - I Date:	by	
						1			SCALE				nposi
	BASIC SERIES:	8D	5 - 1	17 M	08 P N				NA	-		General line Tolerances ±	
_	SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 17 CONTACT TYPE : PIN(500 Matings)							SOURIAU WWW.SOU			J.CO		
	PLATING : M =	Nickel					CONTACT LAY	YOUT : 17-08	FORMAT			OURI	
			<u> </u>					1	A3			3D517	'M0
	Н		G	I	F		E		D		С		



-	Т	۵	п –	m	D	<u>с</u>	
		Contact Layout					
4	-x ($ \begin{array}{c} $					
	Cont position A B C C D E F	Contacts Location X-axis Y-axis X-axis (mm) +.000 (0.00) +.236 (5.99) +.128 (3.25) +.006 (2.18) +.230 (5.84) 078 (1.88) +.094 (2.39) 216 (5.49) 094 (2.39) 216 (5.49)					
ω	Shell Arrangement Nuc size no. co	128 (3.25) +.086 (2.18)					
	L						
						SOURIAU shall not be lial due to a use of the Pro the Specifications issued by (professional reco	oducts w y either o
N						PN: 8D	Count FR 05171
					A 17-10-20 ISS DATE Designed By:	016 First Release Latest modification - by Date:	
					TITLE		Comp
_ _					SCALE NA	-{	ral linear rances: ±
					SOURIA	U WWW.SOUR	RIAU.(
				_	FORMAT A3		JRIAU 517N
L	Н	G	F	E	D	С	

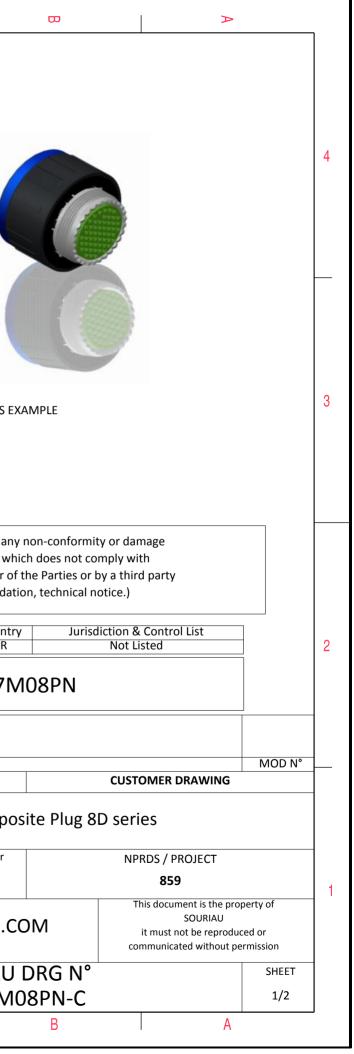