
ב בר	т 	m	D	0				٦
Z'	ØS							
	I			LAYOUT	I SHOWN AS EXAMPLE			
	Keying Shown as e	xample						
CHARACTERISTICS		Connector dimension						
Standard : Based on MIL-DTL-38999 Series III		DimNominalØS35.7 Max						
-Shell Material : Composite -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy	v	Z' 31.5 Max /V THREAD M25x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)				
-Seals & Grommet : Silicon Elastomer						tion & Control List]	
-Contact Plating : Gold over copper Alloy 0.8µm minimum	n			FR Not Listed				
-Durability : 500 Mating cycles -Delivered without Souriau contacts				PN: 8D517M35PAL				
-Temperature Range <u>-</u> -65°C to +200°C								
-Salt Spray : 2000 hours			A 17-10	0-2016 First Release				
Mass : 21.9 g ± 10%			ISS DA Designed By:	ATE Latest modification - b Date:		CUSTOMER DRAWING	MOD N°	
			TITLE		Composite Plug 8D series			
			SCALE		General linear	NPRDS / PROJECT		_
BASIC SERIES: 8D 5 - 17 SHELL TYPE : Plug with RFI Shielding	M 35 P A L	Delivered W/O Contac			Tolerances: ±	859		
CONTACT TYPE : Standard Crimp Contact		ORIENTATION :	<u> </u>			This document is the prop SOURIAU	perty of	_
SHELL SIZE : 17		CONTACT TYPE : PIN(500 Mating	– SOUKI	AU WWW.SC	URIAU.COM	it must not be reproduc communicated without pe		
PLATING : M = Nickel		CONTACT TITL : FIN(500 Mating	-	С (OURIAU DRG N°	communicated without pe	SHEET	-
	I		<u> </u>		D517M35PAL-C		1/2	

ſ	Ŧ	۵		т	т	D		0	
4		Contact Layout							
	2 -312 (7.92) 3 -312 (7.92) 4 -242 (6.15) 5 -234 (5.94)	Y-axis (mm) Contact position ID X-axis (mm) Y- (mm) Y- (mm) +.086 (2.18) 29 .000 (0.00) 094 094 (2.39) 31 .000 (0.00) 184 094 (2.39) 31 .000 (0.00) 274 +.221 (5.61) 32 +.089 (2.26) +.314 +.131 (3.33) 33 +.078 (1.98) +.217	xis (2.39) (4.67) (0.90) (5.61) (3.33) (1.04)						
ω	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	-139 (3.53) 36 +.078 (1.98)044 -229 (5.82) 37 +.078 (1.98)133 +.279 (7.09) 38 +.078 (1.98)225 +.176 (4.47) 39 +.078 (1.98)315 +.086 (2.18) 40 +.172 (4.37) +.275 004 (0.10) 41 +.156 (3.96) +.177 094 (2.39) 42 +.156 (3.96) +.084 184 (4.67) 43 +.156 (3.96)004 274 (6.96) 44 +.156 (3.96)014 +.316 (8.03) 45 +.156 (3.96)184 +.221 (5.61) 46 +.156 (3.96)274 Contacts (Insert arrangement 17-35) n Location	(1.24) (3.53) (5.62) (8.10) (7.09) (4.47) (2.18) (0.10) (2.39) (4.67) (6.96)						
	position X-axis ID (mm) 19 -078 (1.98) 20 -078 (1.98) 21 -078 (1.98) 22 -078 (1.98) 23 -078 (1.98) 24 -078 (1.98) 25 .000 (0.00) 26 .000 (0.00) 27 .000 (0.00) 28 .000 (0.00) Shell Arrangement no. Nu	+.131 (3.33) 47 +.242 (6.15) +.221 +.041 (1.04) 48 +.234 (5.94) +.131 049 (1.24) 49 +.234 (5.94) +.041 139 (3.05) 50 +.234 (5.94) 049 229 (5.82) 51 +.234 (5.94) 139 319 (8.10) 52 +.234 (5.94) 139 319 (8.30) 53 +.312 (7.92) +.006 +.176 (4.47) 54 +.312 (7.92) 004 004 (0.10) mber of Size Service Contact Sup rating location	n) 5.61) 3.33) 1.04) 1.24) 3.53) 5.62) 2.18) 0.10) 2.39) 					SOURIAU shall no due to a use of the Specifications is (profession	the Products w
N	17 -35	55 22D M Ali MS	7529-35			L			Count FR : 8D517N
						A ISS Desig		6 First Release Latest modification Date:	- by
<u> </u>							TITLE		Compo General linear Tolerances: ±
					_	FO	DURIAU RMAT A3		SOURIAU.(SOURIAU 8D517M
L	Н	G		F	E	D		С	

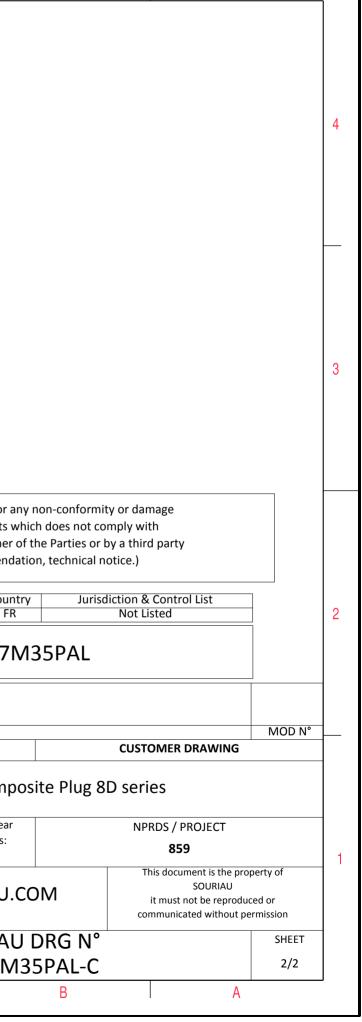

 \triangleright

σ