
	П	m			0		Φ			
	ØS									
	Keying Shown a				LA	YOUT SHOWN AS EXAN	MPLE			
CHARACTERISTICS		Connector dimension								
-Standard : Based on MIL-DTL-38999 Series III	-	Dim Nominal ØS 35.7 Max	_	[]	
-Shell Material : Composite	E	Z' 31.5 Max				not be liable for any no				
-Shell Plating : Nickel -Insulator : Thermoplastic	L	VV THREAD M25x1-6g				of the Products which s issued by either of the				
-Contacts : Copper Alloy					-	onal recommendation				
-Seals & Grommet : Silicon Elastomer]	
-Seals & Grommer : Sincon Liastonier	1					Country FR		& Control List Listed	-	
-Durability : 500 Mating cycles						I			Ī	
-Delivered with Souriau contacts and Accessories					P	N: 8D517M7	75SD			
-Temperature Range65°C to +200°C			[
-Salt Spray : 2000 hours				A 17-:	10-2016 First Release					
Mass : 42.6 g ± 10%					DATE Latest modificatio	on - by			MOD N°	,
				Designed By:	: Date:		CUS	STOMER DRAWING		
				тіті	LE	Composit	te Plug 8D se	ries		
BASIC SERIES: 8D 5 - 17	M 75 S D			SCALE		General linear	Ν	IPRDS / PROJECT		
				NA	$ \vdash \bigcirc \bigcirc$	Tolerances: ±		859		ľ
SHELL TYPE : Plug with RFI Shielding					- T	÷		This document is the pro	perty of	
CONTACT TYPE : Standard Crimp Contact			RIENTATION : D	SOUR	RIAU WWW	.SOURIAU.CO		SOURIAU it must not be reprodu		
		CONTACT TYPE : SOCKET						communicated without pe		
SHELL SIZE : 17				FORMAT						
SHELL SIZE : 17 PLATING : M = Nickel		CONTACT L	AYOUT : 17-75	A3		SOURIAU D 8D517M75			SHEET	

-	Ŧ	Q	нт —	m		0
4		Contact Layout 75				
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75				
ω						
						SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either o (professional recommendat
N					A 17-10-20	Countr FR PN: 8D517N
					ISS DATE Designed By: TITLE	Date:
					SCALE NA SOURIA	General linear Tolerances: ± U WWW.SOURIAU.C SOURIAU
	Н	G	F	E	A3 D	8D517M

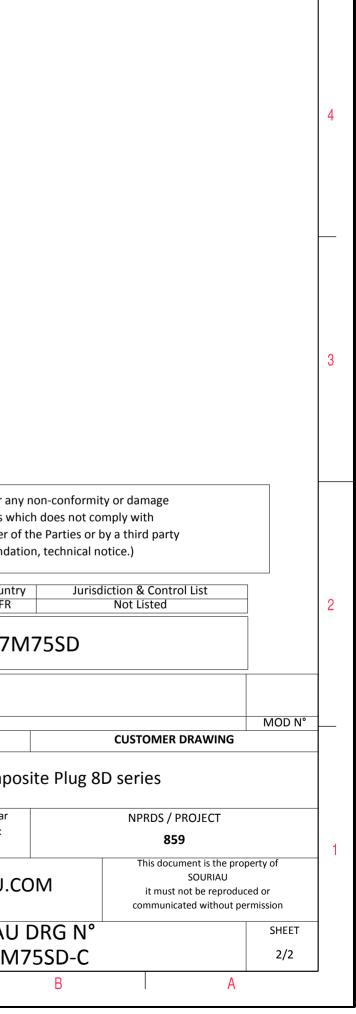

 \triangleright

σ