
			0	œ		
						2
CHARACTERISTICS	Keying Shown as example	_	LAYOUT SHOW	IN AS EXAMPLE		\$
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Aluminium -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer	Connector dimensionDimNominalØS41.7 MaxZ31 MaxVV THREADM31x1-6g		due to a use of the Prod the Specifications issued by e	e for any non-conformity or da ucts which does not comply w either of the Parties or by a thi mendation, technical notice.) Country Jurisdiction	vith	
<ul> <li>-Contact Plating : Gold over copper Alloy 0.8μm minimum</li> <li>-Durability : 500 Mating cycles</li> <li>-Delivered with Souriau contacts and Accessories</li> <li>-Temperature Range : -65°C to +200°C</li> </ul>			D-2016 First Release		Listed	2
-Salt Spray : 48 hours			ATE Latest modification - by Date:	CUS	MO TOMER DRAWING	DD N°
		TITLE Aluminium Plug 8D series			ries	
BASIC SERIES: 8D 5 - 21 F 4 SHELL TYPE : Plug with RFI Shielding	12 B C	SCALE	General Toleran ±	nces:	PRDS / PROJECT <b>859</b>	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 21	ORIE CONTACT TYPE : SOCKET(	ENTATION : C 500 Matings)	AU WWW.SOURI	AU.COM	This document is the property of SOURIAU it must not be reproduced or ommunicated without permission	
PLATING : F = Nickel	CONTACT LA	YOUT : 21-42 FORMAT A3		RIAU DRG N° 21F42BC-C		IEET
H G	F E	D		B	A	

r	т	۵	г	m	U	0	
4		Contact Layout 42					
	Ctc A B	2#4 Power 21-42 X Y 0 6.19 0 -6.19					
ယ							
	-					SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional recon	oducts wh either o mmendat
N						PN: 8D	Countr FR
					A 06-10-20 ISS DATE Designed By:	Date:	
_					SCALE NA		
					FORMAT	SOU	RIAU
	Н	G	F	E	A3 D	8D5	521F4

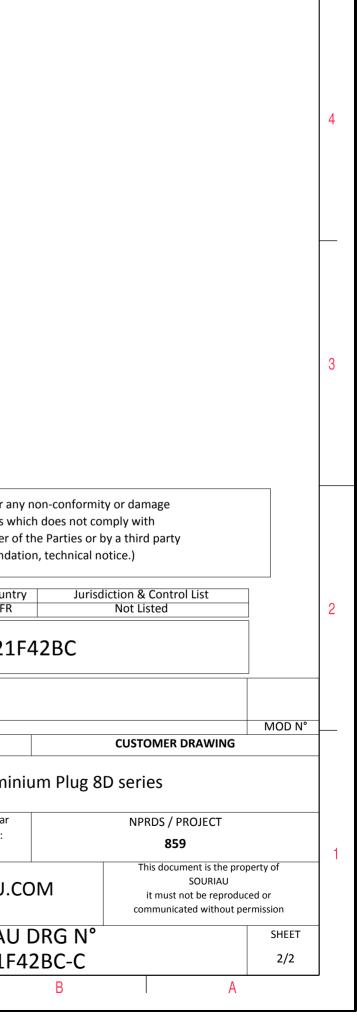

 $\triangleright$ 

σ