
ſ	т (С. С. С		0]
4	Z PBULIE PBU					4
ω			LAYOUT SHOWN AS EXAM	APLE		3
	Keying Shown as example					
	CHARACTERISTICS Connector dimension					
	-Standard : Based on MIL-DTL-38999 Series III Dim Nominal					
N	-Shell Material : Aluminium ØS 41.7 Max -Shell Plating : Nickel Z 31 Max -Insulator : Thermoplastic VV THREAD M31x1-6g -Contacts : Copper Alloy - - -Seals & Grommet : Silicon Elastomer - - -Contact Plating : Gold over copper Alloy 0.8μm minimum - -		SOURIAU shall not be liable for any no due to a use of the Products which the Specifications issued by either of the (professional recommendation Country FR	does not comply with e Parties or by a third party		2
	-Durability : 500 Mating cycles -Delivered without Souriau contacts		PN: 8D521F42PAL			
	-Temperature Range -65°C to +200°C	A 06-10-2016	First Release			-
	-Salt Spray : 48 hours	ISS DATE	Latest modification - by		MOD N°	_
		Designed By:	Date:	CUSTOMER DRAWING		
		TITLE	Aluminium Plug 8D series			
_ _	BASIC SERIES: 8D 5 - 21 F 42 P A L SHELL TYPE : Plug with RFI Shielding	SCALE -	General linear Tolerances:	NPRDS / PROJECT 859		-
	CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 21 CONTACT TYPE : PIN(500 Mat	- SOURIAU	- SOURIAU WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or			
	PLATING : F = Nickel CONTACT LAYOUT : 2		SOURIAU D		SHEET	-
		A3	8D521F42I		1/2	

	т	۵	ار (m	D	0	
4	(Contact Layout 42					
	Ctc A B	2#4 Power 21-42 X Y 0 6.19 0 -6.19					
ω							
	F					SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional recon	oducts wh v either o mmendat
N						PN: 8D	Countr FR 9521F
					A 06-10-202 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
<u> </u>					SCALE NA	Genera 	Alumin al linear rances: t
					FORMAT A3	SOU	
l	Н	G	F	E	D	C	

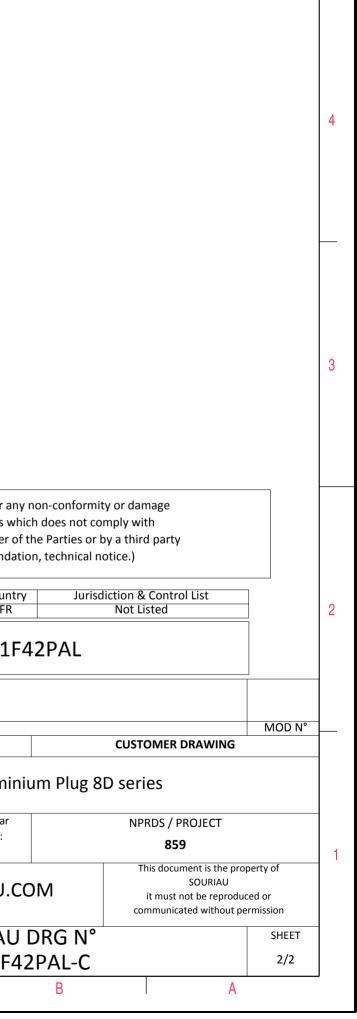

 \triangleright

σ